

LEGERO



Catalogue 2019

www.legerolighting.com





WHO WE ARE?

***Simply put, we are a lighting solutions company.
While at the same time, we are more than that.***

By offering eco-friendly and energy saving commercial lighting solutions in India through varied sectors, we have developed advanced energy efficient lighting solutions for Commercial, Industrial, Outdoor and Residential Sectors while maintaining low energy costs.

Our company was established in 2009 in India; since then and we have become a pioneer and have retained the leadership position in the management and application of lighting solutions.

STATE OF THE ART R&D

Our Research & Development laboratory comprises various types of testing equipment. These help us keep up with the latest industry standards in the field of lighting. Our lab also caters to harnessing newer technologies in manufacturing, thus helping us achieve maximum efficiency, top-notch quality to leave a minimal carbon footprint.





IN-HOUSE MANUFACTURING

Our team comprises of locally skilled employees with our own R&D unit that strives to constantly stay ahead of the curve by polishing our existing technology, with innovative solutions and novel design approaches.



CONTENTS



RECESSED DOWNLIGHTS

6-17



SURFACE & SUSPENDED DOWNLIGHTS

18-26



SURFACE MOUNTED LUMINAIRES

27-28



RECESSED LUMINAIRES

29-32



SURFACE & SUSPENDED LUMINAIRES

33-34




ARCHITECTURAL LUMINAIRES

35-47



DECORATIVE LUMINAIRES

48-49



INDUSTRIAL LUMINAIRES

52-56




OUTDOOR LUMINAIRES

57-67

RECESSED DOWNLIGHTS


OMEGA



A versatile collection of energy efficient round LED downlight for general lighting in various applications. These recessed diffused round LED downlights are made of high efficient die-cast aluminium housing with high transmission factor PMMA sheet.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LVT 6505	5	3000K/4000K/6000K	102	112 53
LVT 6507	7	3000K/4000K/6000K	102	112 53
LVT 6509	9	3000K/4000K/6000K	134	145 53
LVT 6512	12	3000K/4000K/6000K	134	145 53
LVT 6515	15	3000K/4000K/6000K	164	175 60
LVT 6518	18	3000K/4000K/6000K	164	175 60
LVT 6522	22	3000K/4000K/6000K	164	175 60


BRILLO



Collection of energy efficient square LED downlighter with housing made up of die-cast aluminium & high transmission factor PMMA sheet.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDT 7507	7	3000K/4000K/6000K	85 94	100 100 51
LDT 7515	15	3000K/4000K/6000K	146 146	154 154 62
LDT 7518	18	3000K/4000K/6000K	146 146	154 154 62
LDT 7522	22	3000K/4000K/6000K	146 146	154 154 62


PEARL (R)



Sleek round backlit LED downlight made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 2005	5	3000K/4000K/6000K	79	108 30
LRS 2012	12	3000K/4000K/6000K	105	130 30
LRS 2015	15	3000K/4000K/6000K	138	160 30
LRS 2018	18	3000K/4000K/6000K	138	160 30


PEARL (Sq)



Sleek square backlit LED downlight made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 3005	5	3000K/4000K/6000K	79 x 79	108 108 30
LRS 3012	12	3000K/4000K/6000K	105 x 105	130 130 30
LRS 3015	15	3000K/4000K/6000K	138 x 138	160 160 30
LRS 3018	18	3000K/4000K/6000K	138 x 138	160 160 30


CORAL (R)



Sleek round panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 4006	6	3000K/4000K/6000K	80	95 30
LRS 4012	12	3000K/4000K/6000K	142	159 30
LRS 4015	15	3000K/4000K/6000K	176	196 30
LRS 4018	18	3000K/4000K/6000K	176	196 30

CORAL (Sq)

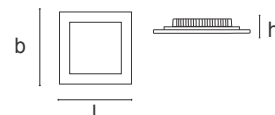


Sleek square backlit LED downlight made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 5006	6	3000K/4000K/6000K	83.5 x 83.5	100 100 30
LRS 5012	12	3000K/4000K/6000K	119.5 x 119.5	140 140 30
LRS 5015	15	3000K/4000K/6000K	176 x 176	190 190 30
LRS 5018	18	3000K/4000K/6000K	176 x 176	190 190 30

RECESSED DOWNLIGHTS


Geo (R)



Sleek square backlit LED downlight made up of die cast housing & light weight plastic trim designed for better aesthetics with high efficacy LEDs and diffuser to give glare free output.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 3005	5	3000K/4000K/6000K	79 x 79	108 108 30
LRS 3012	12	3000K/4000K/6000K	105 x105	130 130 30
LRS 3015	15	3000K/4000K/6000K	138 x 138	160 160 30
LRS 3018	18	3000K/4000K/6000K	138 x 138	160 160 30


Geo (Sq)



Sleek round panel downlight with integrated edge-lit LEDs installed with highly efficient low glare sheet for optimum light distribution. Available in die-cast aluminium housing .

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 4006	6	3000K/4000K/6000K	80	95 30
LRS 4012	12	3000K/4000K/6000K	142	159 30
LRS 4015	15	3000K/4000K/6000K	176	196 30
LRS 4018	18	3000K/4000K/6000K	176	196 30


ATOM



The spotlight combines a sharp design with energy efficient LED module. The high quality lens further enhances the quality of the product which is housed within a die-cast aluminium body.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 1002	2	3000K/4000K/6000K	20°	29	38 28
LRS 1002-R	2	RED	20°	29	38 28
LRS 1002-G	2	GREEN	20°	29	38 28
LRS 1002-B	2	BLUE	20°	29	38 28


FLORA

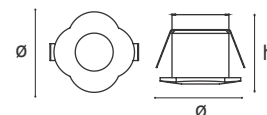

The spotlight combines a floral design with energy efficient LED module. The high quality lens further enhances the quality of the product which is housed within a die-cast aluminium body.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LFO 2002	2	3000K/4000K/6000K	20°	28	38.2 29
LFO 2002-R	2	RED	20°	28	38.2 29
LFO 2002-G	2	GREEN	20°	28	38.2 29
LFO 2002-B	2	BLUE	20°	28	38.2 29


FLAKE



The spotlight combines a curve design with energy efficient LED module. The high quality lens further enhances the quality of the product which is housed within a die-cast aluminium body.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LFA 3002	2	3000K/4000K/6000K	20°	27	38 27.8
LFA 3002-R	2	RED	20°	27	38 27.8
LFA 3002-G	2	GREEN	20°	27	38 27.8
LFA 3002-B	2	BLUE	20°	27	38 27.8

CEIBA




Small adjustable recessed downlight with die-cast aluminum body & diffuser with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 1005	5	3000K/4000K/6000K	60	66 42

RECESSED DOWNLIGHTS


CIBO



Small adjustable recessed downlight with die-cast aluminum body & lens with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 1103	3	3000K/4000K/6000K	25°	60	66 42
LRS 1105	5	3000K/4000K/6000K	25°	60	66 42


CRIBO



Small adjustable recessed downlight with die-cast aluminum body & reflector with 15 degree tilt option, excellent heat sink capability to minimize luminous degradation.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 1203	3	3000K/4000K/6000K	20°	60	66 42
LRS 1205	5	3000K/4000K/6000K	20°	60	66 42


ZIVA



Recessed small COB down light in circular shape made of die cast aluminum housing and has robust heat sink for excellent thermal management. It consist of high efficiency aluminum reflector to produce excellent light output.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 1303	3	3000K/4000K/6000K	40°	52.5	57 38.5
LRS 1305	5	3000K/4000K/6000K	40°	52.5	57 38.5


GIA

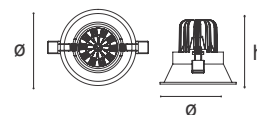

Small Recessed COB Round down lights made of die cast aluminum with powder coating finish. Excellent heat sink capacity to minimize luminous degradation.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 8008	8	3000K/4000K/6000K	25°	61	68 66


MIA



Small Recessed COB Square down lights made of die cast aluminum with powder coating finish. Excellent heat sink capacity to minimize luminous degradation.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 8108	8	3000K/4000K/6000K	25°	61 x 61	70 70 63

STELLA

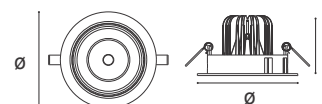


Recessed adjustable COB downlight in circular shape, made of die cast aluminium housing and has robust heat sink for excellent thermal management. It consist of high efficiency aluminium reflector to produce excellent light output.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 5507	7	3000K/4000K/6000K	50°	93	105 67
LHR 5512	12	3000K/4000K/6000K	50°	93	105 67
LHR 5514	14	3000K/4000K/6000K	50°	93	105 67

RECESSED DOWNLIGHTS


OPAL

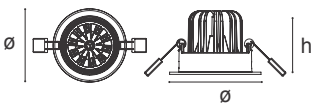

Recessed adjustable COB down light made of die cast aluminum housing and robust heat sink for excellent thermal management. It consists of high efficiency aluminum reflector to produce excellent light output.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 6007	7	3000K/4000K/6000K	50°	75	88 67
LRS 6012	12	3000K/4000K/6000K	50°	75	88 67
LRS 6014	14	3000K/4000K/6000K	50°	75	88 67
LRS 6020	20	3000K/4000K/6000K	50°	106	88 78
LRS 6025	25	3000K/4000K/6000K	50°	106	88 78


SOL

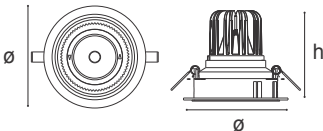

Decorative deep COB spot downlight combines high output, varied lamp technology with a black inner smooth reflector. Made in die-cast aluminium designer trim with textured powder coating.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LHR 5607	7	3000K/4000K/6000K	50°	94	105 101
LHR 5612	12	3000K/4000K/6000K	50°	94	105 101
LHR 5614	14	3000K/4000K/6000K	50°	94	105 101


AVIO

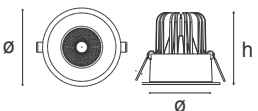

The COB spot light with softly contoured aluminium reflector and energy efficient light source that combines to produce a luminaire of exceptional style and performance.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 7007	7	3000K/4000K/6000K	50°	70	82 79
LRS 7012	12	3000K/4000K/6000K	50°	70	82 79
LRS 7014	14	3000K/4000K/6000K	50°	70	82 79


NOVA

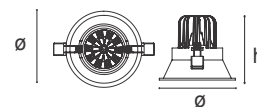

Decorative deep COB spot downlight with designer trim and deep recessed reflector to cut glare.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 5107	7	3000K/4000K/6000K	50°	93	104.6 96
LRS 5112	12	3000K/4000K/6000K	50°	93	104.6 96
LRS 5114	14	3000K/4000K/6000K	50°	93	104.6 96


IRIS

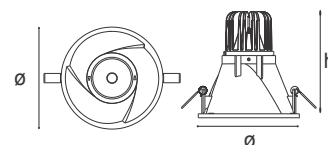

Unique and exciting range of exceptionally trimless recessed COB spot lights. It consist of high efficiency aluminium reflector to produce excellent light output. Fixture is made of die-cast aluminium powder coated housing.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 5807	7	3000K/4000K/6000K	50°	110	115 125
LHR 5812	12	3000K/4000K/6000K	50°	110	115 125
LHR 5814	14	3000K/4000K/6000K	50°	110	115 125

IRIS-D

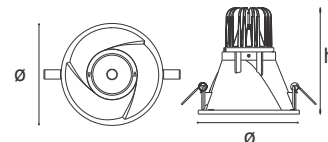


Unique and exciting range of exceptionally trimless recessed diffuse light. It consist of high efficiency Diffuser. Fixture is made of die-cast aluminium powder coated housing.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 5107	7	3000K/4000K/6000K	60°	110	115 126
LHR 5112	12	3000K/4000K/6000K	60°	110	115 126
LHR 5114	14	3000K/4000K/6000K	60°	110	115 126

RECESSED DOWNLIGHTS


ARIA

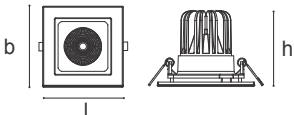

High efficiency square COB recessed downlight encompassing of die-cast trim and deep recessed reflector to cut glare. Suitable for multiple applications. Optical and thermal solution for high performance.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 9007	7	3000K/4000K/6000K	50°	79x94	100 100 87
LRS 9012	12	3000K/4000K/6000K	50°	79x94	100 100 87
LRS 9014	14	3000K/4000K/6000K	50°	79x94	100 100 87


VIVA

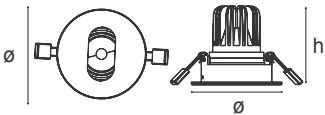

The oval slot trim COB downlight features a deep recessed lamp position for minimal glare. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LHR 6607	7	3000K/4000K/6000K	50°	83	100 90
LHR 6612	12	3000K/4000K/6000K	50°	83	100 90
LHR 6614	14	3000K/4000K/6000K	50°	83	100 90


LEO

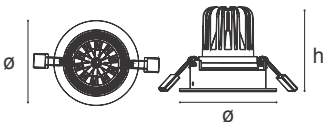

Pinhole deep COB features a small diameter aperture & a deep recessed lamp position that provides optical glare control. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LHR 6407	7	3000K/4000K/6000K	50°	83	100 92.5
LHR 6412	12	3000K/4000K/6000K	50°	83	100 92.5
LHR 6414	14	3000K/4000K/6000K	50°	83	100 92.5



VELA



The COB wallwasher with softly contoured aluminium reflector & energy efficient light source that combines to produce a luminaire of exceptional performance.


PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 6507	7	3000K/4000K/6000K	50°	88	96 96
LHR 6512	12	3000K/4000K/6000K	50°	88	96 96
LHR 6514	14	3000K/4000K/6000K	50°	88	96 96

DOCCO



Compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LHR 6107	7	3000K/4000K/6000K	50°	106 106	110 110 73
LHR 6112	12	3000K/4000K/6000K	50°	106 106	110 110 73
LHR 6114	14	3000K/4000K/6000K	50°	106 106	110 110 73


DOUBLE
DOCCO

Twin decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LHR 6214	14	3000K/4000K/6000K	50°	185 106	205 110 73
LHR 6224	24	3000K/4000K/6000K	50°	185 106	205 110 73
LHR 6228	28	3000K/4000K/6000K	50°	185 106	205 110 73

RECESSED DOWNLIGHTS


TRIPLE DOCCO

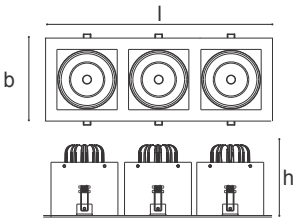

Triple decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources .

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LHR 6321	21	3000K/4000K/6000K	50°	280 106	298 110 95
LHR 6336	36	3000K/4000K/6000K	50°	280 106	298 110 95
LHR 6342	42	3000K/4000K/6000K	50°	280 106	298 110 95


AVIO 2

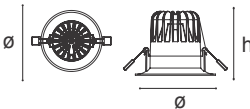

High efficiency COB recessed downlight encompassing of die-cast trim and deep recessed reflector with glass to cut glare. Suitable for multiple applications. Optical and thermal solution for high performance.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 7018	18	3000K/4000K/6000K	40°	117	125 95
LRS 7022	22	3000K/4000K/6000K	40°	117	125 95


OMEGA-R

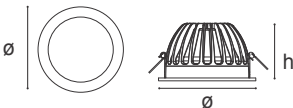

Recessed COB downlights made of high efficiency die-cast aluminium with powder coated finish. Available with comprehensive choice of color temperatures and wattages.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 6715	15	3000K/4000K/6000K	30°	133	145 88
LHR 6720	20	3000K/4000K/6000K	30°	133	145 88
LHR 6725	25	3000K/4000K/6000K	30°	133	145 88
LHR 6730	30	3000K/4000K/6000K	30°	133	145 88

SIGMA

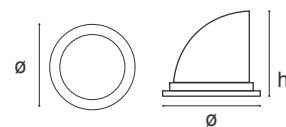


The design features include fully enclosed precision die-cast aluminium construction, excellent pan and tilt adjustment. These adjustable recessed single chip COB downlights consist of high purity aluminium reflector.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LHR 6815	15	3000K/4000K/6000K	102	114 98
LHR 6825	25	3000K/4000K/6000K	129	137 121
LHR 6835	35	3000K/4000K/6000K	154	163 148
LHR 6845	45	3000K/4000K/6000K	174	190.5 167

SURFACE & SUSPENDED DOWNLIGHTS


OMEGA SURFACE

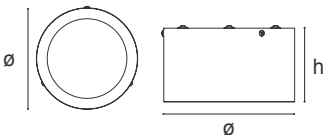

Surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LVS 6512	12	3000K/4000K/6000K	NA	149 105
LVS 6515	15	3000K/4000K/6000K	NA	177.5 107
LVS 6518	18	3000K/4000K/6000K	NA	177.5 107


OMEGA SUSPENDED

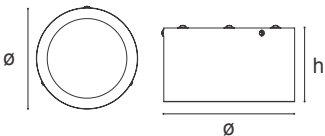

Suspended LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LVS 6712	12	3000K/4000K/6000K	NA	149 105
LVS 6715	15	3000K/4000K/6000K	NA	177.5 107
LVS 6718	18	3000K/4000K/6000K	NA	177.5 107


CORAL SURFACE (R)

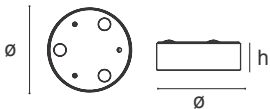

Surface mounted round panel downlight with integrated edge lit leds with highly efficient and low glare sheet for optimum light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 3106	6	3000K/4000K/6000K	NA	98 43
LRS 3112	12	3000K/4000K/6000K	NA	160 43
LRS 3115	15	3000K/4000K/6000K	NA	202 48.5
LRS 3118	18	3000K/4000K/6000K	NA	202 48.5


CORAL SURFACE (Sq)



Surface mounted square panel downlight with integrated edge lit leds with highly efficient and low glare sheet for optimum light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 4106	6	3000K/4000K/6000K	NA	102 102 34
LRS 4112	12	3000K/4000K/6000K	NA	141 141 42
LRS 4115	15	3000K/4000K/6000K	NA	191.5 191.5 42
LRS 4118	18	3000K/4000K/6000K	NA	191.5 191.5 42


ZION D SURFACE

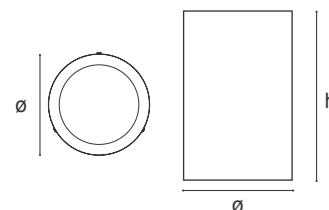

Slim surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LED for better light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LSM 5615	15	3000K/4000K/6000K	NA	94 154

ZION D SUSPENDED

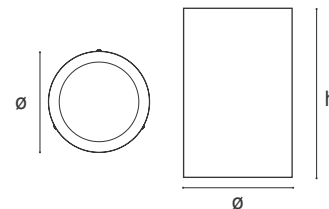


Slim suspended COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LSM 5715	15	3000K/4000K/6000K	NA	94 154

SURFACE & SUSPENDED DOWNLIGHTS


RIO

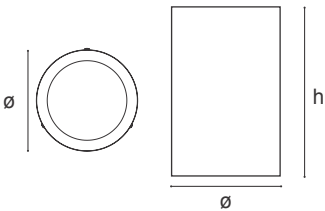

Slim COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 3307	7	3000K/4000K/6000K	50°	NA	103 129
LRS 3312	12	3000K/4000K/6000K	50°	NA	103 129
LRS 3314	14	3000K/4000K/6000K	50°	NA	103 129


RIO MINI

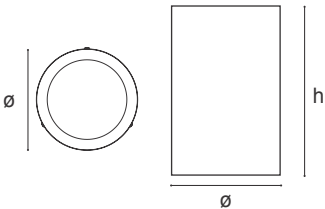

Slim COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LRS 3106	6	3000K/4000K/6000K	40°	NA	70 82


OMEGA-R SURFACE

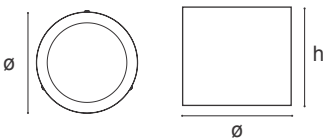

Surface COB downlight with high efficient COB & reflector for better light distribution. Housing made of CRCA.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LVS R 6520	20	3000K/4000K/6000K	30°	NA	148 135
LVS R 6525	25	3000K/4000K/6000K	30°	NA	148 135
LVS R 6530	30	3000K/4000K/6000K	30°	NA	148 135


OMEGA-R SUSPENDED

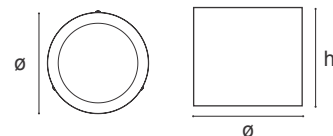

Suspended COB downlight with high efficient COB & reflector for better light distribution. Housing made of CRCA.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LVS R 6820	20	3000K/4000K/6000K	30°	NA	148 135
LVS R 6825	25	3000K/4000K/6000K	30°	NA	148 135
LVS R 6830	30	3000K/4000K/6000K	30°	NA	148 135


NORA

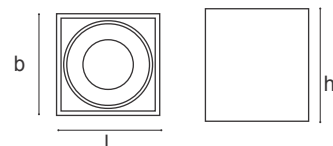

Surface mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDN 7110	1x10	3000K/4000K/6000K	50°	NA	99 99 109
LDN 7114	1x14	3000K/4000K/6000K	50°	NA	99 99 109

NORA SUSPENDED

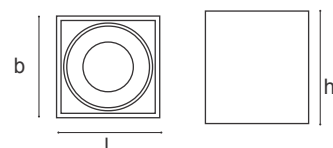


Suspended mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDN 7310	1x10	3000K/4000K/6000K	50°	NA	99 99 109
LDN 7314	1x14	3000K/4000K/6000K	50°	NA	99 99 109

SURFACE & SUSPENDED DOWNLIGHTS


NORA-D

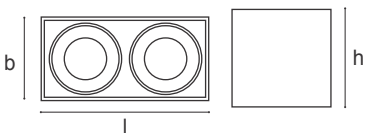

Surface mounted twin adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDN 7210	2x10	3000K/4000K/6000K	50°	NA	186 97 109
LDN 7214	2x14	3000K/4000K/6000K	50°	NA	186 97 109


NORA-D SUSPENDED

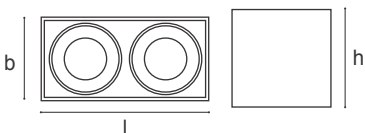

Suspended mounted twin adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDN 7410	2x10	3000K/4000K/6000K	50°	NA	186 97 109
LDN 7414	2x14	3000K/4000K/6000K	50°	NA	186 97 109


TUBO SURFACE

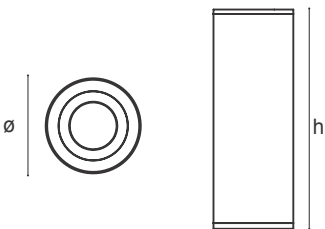

Surface mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 3307	7	3000K/4000K/6000K	40°	NA	63 185
LRS 3312	12	3000K/4000K/6000K	40°	NA	63 185
LRS 3320	20	3000K/4000K/6000K	40°	NA	88 200
LRS 3325	25	3000K/4000K/6000K	40°	NA	88 200


TUBO SUSPENDED



Suspended mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS-S 3307	7	3000K/4000K/6000K	40°	NA	63 185
LRS-S 3312	12	3000K/4000K/6000K	40°	NA	63 185
LRS-S 3320	20	3000K/4000K/6000K	40°	NA	88 200
LRS-S 3325	25	3000K/4000K/6000K	40°	NA	88 200


TUBO-D SURFACE



Surface mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has Diffused light with efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 3410	10	3000K/4000K/6000K	NA	63 185
LRS 3414	14	3000K/4000K/6000K	NA	63 185
LRS 3420	20	3000K/4000K/6000K	NA	88 200
LRS 3425	25	3000K/4000K/6000K	NA	88 200

TUBO-D SUSPENDED




Suspended mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS-S 3410	10	3000K/4000K/6000K	NA	63 185
LRS-S 3414	14	3000K/4000K/6000K	NA	63 185
LRS-S 3420	20	3000K/4000K/6000K	NA	88 200
LRS-S 3425	25	3000K/4000K/6000K	NA	88 200

SURFACE & SUSPENDED DOWNLIGHTS


FOLLY

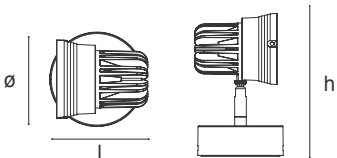

Surface mounted COB adjustable track light made of die cast housing and heat sink for efficient heat dissipation. Deep diamond facet reflector, for better light distribution.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø l h
LRS 6108	8	3000K/4000K/6000K	50°	NA	86.8 90 145
LRS 6110	10	3000K/4000K/6000K	50°	NA	86.8 90 145

FOCUS

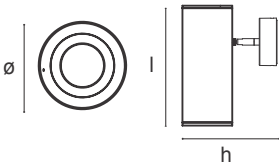

Surface mounted cylindrical COB adjustable track with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution.

PRODUCT ID	WATT	CCT	BEAM ANGLES	CUTOUT (mm) ø	DIMENSION (mm) ø l h
LRS 3308	8	3000K/4000K/6000K	50°	NA	63 110 125

LYNX IP 20



Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an IP 20 product.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LRS 2106	6	3000K/4000K/6000K	NA	NA
LRS 2114	14	3000K/4000K/6000K	NA	NA


LYNX IP 65



Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an IP 65 product.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LRS 2206	6	3000K/4000K/6000K	NA	NA
LRS 2214	14	3000K/4000K/6000K	NA	NA

LINO




Decorative LED batten light in square shape with high efficient PC Cover & end caps.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LRS 9110	10	3000K/4000K/6000K	NA	595 22 36.5
LRS 9920	20	3000K/4000K/6000K	NA	1135 22 36.5

CONSUMER LUMINAIRES



LITA



Decorative LED batten light in square shape with high efficient PC Cover & end caps.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LRS 9110	10	3000K/4000K/6000K	NA	601 24 38
LRS 9920	20	3000K/4000K/6000K	NA	1186 24 38
LRS 9124	24	3000K/4000K/6000K	NA	1186 24 38


CLAY



Compact and sleek downlight used for retail lighting and other indoor applications.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LRS 2007	7	3000K/4000K/6000K	87	119 74
LRS 2009	9	3000K/4000K/6000K	87	119 74


ALVO

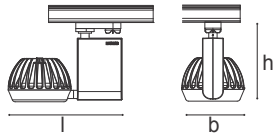

Alvo track light is highly efficient with a low-profile design. Ideal for accent and display lighting applications, the fixtures feature die-cast aluminium construction in sleek, simple designs.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LTL 1220	20	3000K/4000K/6000K	25°	220 120 196
LTL 1225	25	3000K/4000K/6000K	25°	220 120 196
LTL 1230	30	3000K/4000K/6000K	25°	220 120 196


ALVO
SURFACE

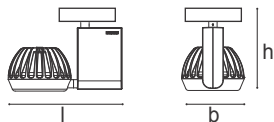

Surface mounted Alvo track light is highly efficient with a low-profile design. Ideal for accent and display lighting applications, the fixtures feature die-cast aluminium construction in sleek, simple designs.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LTL 1120	20	3000K/4000K/6000K	25°	220 120 196
LTL 1125	25	3000K/4000K/6000K	25°	220 120 196

AURA

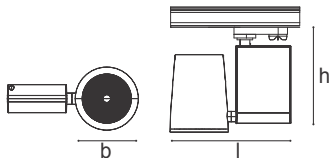


Organic design with die cast housing & heat sink for efficient heat dissipation. Ideal for retail & hospitality. Curved deep diamond facet reflector with glass to cut glare. Optical and thermal solution for high performance.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LAU 0020	20	3000K/4000K/6000K	55°	191 90 171
LAU 0025	25	3000K/4000K/6000K	55°	191 90 171
LAU 0030	30	3000K/4000K/6000K	55°	191 90 171

SURFACE MOUNTED LUMINAIRES



AURA SURFACE

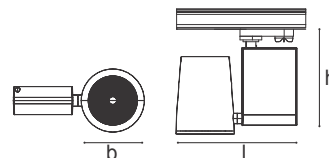

Surface mounted die cast housing and heat sink for efficient heat dissipation in surface mounted option. Can be installed directly on ceiling . Curved deep diamond facet reflector with glass to cut glare .

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LAU 1020	20	3000K/4000K/6000K	55°	191 90 171
LAU 1025	25	3000K/4000K/6000K	55°	191 90 171
LAU 1030	30	3000K/4000K/6000K	55°	191 90 171


SINGLE PHASE TRACK (1m) /(2m)

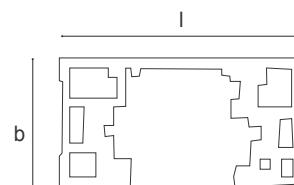

Extruded aluminium construction. Track offers separately controlled circuit with live adaptor & end cap.

PRODUCT ID	WATT	COLOR	CUTOUT (mm) ø	DIMENSION (mm) l b h
TACT 1001	NA	WHITE	NA	17.8 34.3
TACT 1002	NA	BLACK	NA	17.8 34.3
TACT 2001	NA	WHITE	NA	17.8 34.3
TACT 2002	NA	BLACK	NA	17.8 34.3


MINI JOINER SINGLE PHASE

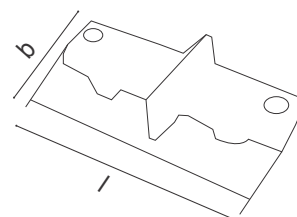

Join two sections of straight track end to end.

PRODUCT ID	WATT	COLOR	CUTOUT (mm) ø	DIMENSION (mm) l b
TAMJ 001	NA	WHITE	NA	80 34
TAMJ 002	NA	BLACK	NA	80 34


SUSPENSION KIT

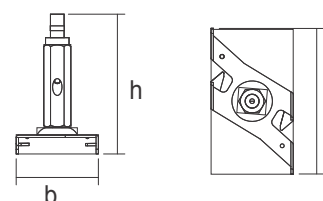

Includes track bracket, rods and suspension wires.

PRODUCT ID	WATT	COLOR	CUTOUT (mm) ø	DIMENSION (mm) l b h
TASK 3001	NA	WHITE	NA	62 35 59.5
TASK 3002	NA	BLACK	NA	62 35 59.5


DELTA



LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module. Fixture comes with two slot optics, combination of prismatic lens with louver. Offering low UGR for improved glare control and better uniformity.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LDG 6025	25	3000K/4000K/6000K	NA	600 600 40

GLACE PEARL



Recessed LED luminaire combines an aesthetically pleasing design with class leading photometrics. This high efficient decorative module boast of extruded matt serrated glare control PMMA diffuser and is suitable for 600x600 Grid ceilings

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LER 3145	45	3000K/4000K/6000K	NA	595 595 90

MODENA




LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module and is enclosed with high efficient flat PMMA low glare diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LER 2620	28	3000K/4000K/6000K	NA	595 595 76
LER 2636	36	3000K/4000K/6000K	NA	595 595 76
LER 2642	42	3000K/4000K/6000K	NA	595 595 76

RECESSED LUMINAIRES


MODENA 1x4

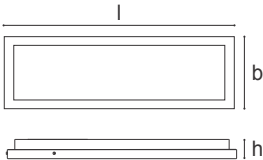

LED ceiling luminaire 1x4 suitable for recessed or suspended application with uniform illumination & higher efficiency.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LER 1240	40	3000K/4000K/6000K	NA	1195 295 80


MOON LIGHT

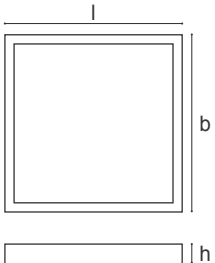

Recessed LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML 6045	45	3000K/4000K/6000K	NA	595 595 60


MOON LIGHT LINEAR 1

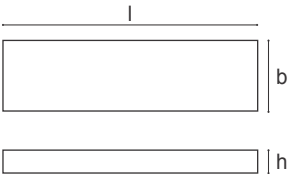

Recessed LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LML 6050	50	3000K/4000K/6000K	NA	1195 295 60


MOON LIGHT LINEAR 2

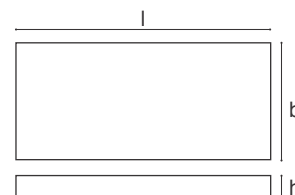

Recessed LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML 6080	80	3000K/4000K/6000K	NA	1195 595 60


PENTO

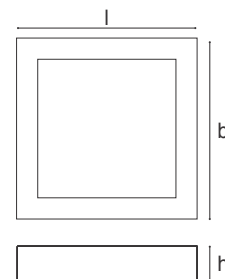

LED Recessed luminaire, suitable for 300 x 300 module with high efficient flat PMMA low glare diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LER 2518	18	3000K/4000K/6000K	280x280	295 295 53

PENTO 2

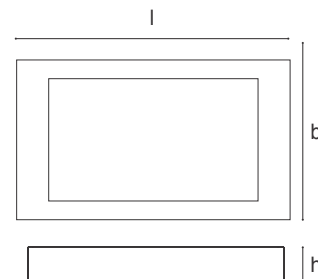


LED Recessed luminaire, suitable for 600 x 300 module with high efficient flat PMMA low glare diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LER 2524	24	3000K/4000K/6000K	580x280	595 298 57

RECESSED LUMINAIRES


AMBER

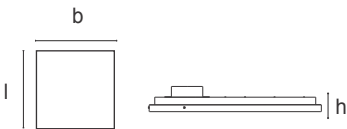

LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module and is enclosed with high efficient flat PMMA low glare diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LRS 3036	36	3000k/4000K/6000K	569x569	595 595 76


MOON
LIGHT SUSP.



A suspended LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML 7045	45	3000K/4000K/6000K	NA	595 595 60


MOON LIGHT
LINEAR 1 SUSP.

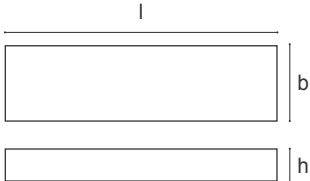

A suspended LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML 7050	50	3000K/4000K/6000K	NA	1195 295 60

MOON LIGHT
LINEAR 2 SUSP.

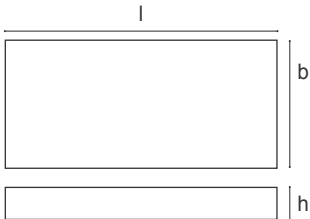


A suspended LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML 7080	80	3000K/4000K/6000K	NA	1195 595 60

SURFACE & SUSPENDED LUMINAIRES


FLARE



This low profile surface mounted luminaire utilizes a one piece housing, and temper - resistant fasteners to maximize impact resistance. This LED luminaire encompasses high efficiency PMMA low glare diffuser mounted on serrated aluminium frame.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LES 4245	45	4000K/6000K	580x580	580 580 62


MENTO

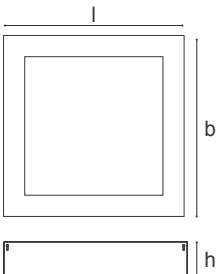

This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides an unobstructed, visually comfortable light. This LED luminaire produces excellent , uniform, low glare light mainly because of the use of high efficiency square shaped PMMA low glare diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LES 4218	18	4000K/6000K	262x262	262 262 54


MENTO 2

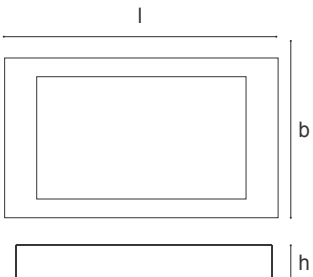

This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides an unobstructed, visually comfortable light. This LED luminaire produces excellent , uniform, low glare light mainly because of the use of high efficiency PMMA low glare diffuser mounted on serrated aluminium frame.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LES 4224	24	4000K/6000K	540x300	540 300 60

SONIC

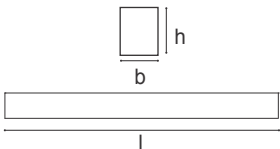


Available in 3 colors

Sonic a perfect suspended luminaire design with step in optics offering a combination of functionality and design. A linear lens combination gives a unique look to this product. A aesthetically pleasant product suitable in various applications like offices, restaurants, Showrooms etc.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LPS 5030	30	3000K/4000K/6000K	NA	1177 57.7 85.6
LPS 5040	40	3000K/4000K/6000K	NA	1177 57.7 85.6

VERGE 5

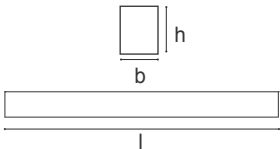


Available in 3 colors

The suspended aluminum extrusion with continuous reflectors optics that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers gives flexible light option to the product.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LVP 5525	25	3000K/4000K/6000K	NA	1186 57.7 85.6
LVP 5530	30	3000K/4000K/6000K	NA	1186 57.7 85.6

VERGE 3

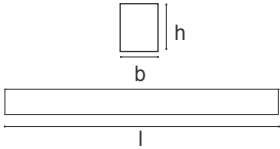


Available in 3 colors

The suspended aluminum extrusion with three reflectors module optics that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers gives flexible light option to the product.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LVP 5325	25	3000K/4000K/6000K	NA	1215 57.7 85.6
LVP 5330	30	3000K/4000K/6000K	NA	1215 57.7 85.6

ARCHITECTURAL LUMINAIRES

VERGE

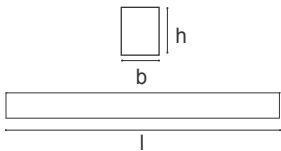


Available in 3 colors

The suspended aluminum extrusion having dual optics with three reflectors module & diffuser that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers and diffused slots gives flexible light option to the product.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LVP 5430	30	3000K/4000K/6000K	NA	1215 57.7 85.6

OLIVE

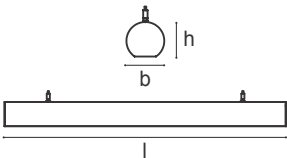


Available in 3 colors

A perfect combination of functionality and design, Olive is designed in an all rounder shape giving a clean aesthetic to a space. A newly designed suspended lighting is now on board, revealing a clean accessible revolutionary design perfectly blending in any space. The housing functions to support other components of the luminaire and provides a mounting mechanism for the attachment of the luminaire. The evolution in commercial lighting has been characterized by progress in all directions ; along with improvements in luminous performance and functional efficiency.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSO 8520	20	3000K/4000K/6000K	NA	1200 87 79.3
LSO 8530	30	3000K/4000K/6000K	NA	1200 87 79.3

TULIP





Available in 3 colors

Tulip a suspended extruded aluminium housing design offers improved uniformity with soft C profile LG7 diffuser lit on all three sides offering a soft homogeneous, volumetric light distribution snap fit diffuser for ease in maintenance.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSO 5020	20	3000K/4000K/6000K	NA	1200 50.5 75
LSO 5030	30	3000K/4000K/6000K	NA	1200 50.5 75

STRAPLINE 50 UP & DOWN

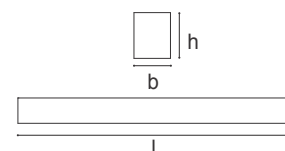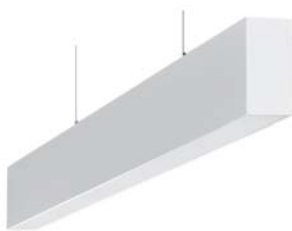


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with Direct-Indirect light distribution, high wired electronic ballast to be used in suspended applications.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-S 5130	30	3000K/4000K/6000K	NA	1200 52.8 101
LSL-S 5140	40	3000K/4000K/6000K	NA	1200 52.8 101

STRAPLINE 72 SUSPENDED

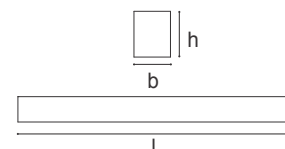


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-S 7220	20	3000K/4000K/6000K	NA	1000/1200 73 78
LSL-S 7230	30	3000K/4000K/6000K	NA	1000/1200 73 78
LSL-S 7240	40	3000K/4000K/6000K	NA	2000/2400 73 78
LSL-S 7260	60	3000K/4000K/6000K	NA	2000/2400 73 78

STRAPLINE 50 SUSPENDED

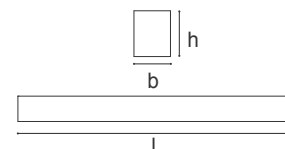


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-S 5020	20	3000K/4000K/6000K	NA	1000/1200 53 80
LSL-S 5030	30	3000K/4000K/6000K	NA	1000/1200 53 80
LSL-S 5040	40	3000K/4000K/6000K	NA	2000/2400 53 80
LSL-S 5060	60	3000K/4000K/6000K	NA	2000/2400 53 80

ARCHITECTURAL LUMINAIRES

STRAPLINE 35 SUSPENDED

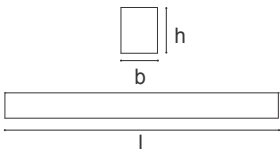


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-S 3520	20	3000K/4000K/6000K	NA	1000/1200 36.5 53
LSL-S 3540	40	3000K/4000K/6000K	NA	2000/2400 36.5 53

STRAPLINE 72 RECESSED

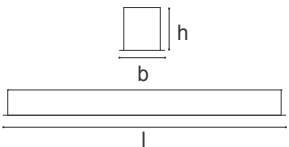


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-R 7220	20	3000K/4000K/6000K	74	1000/1200 92 92
LSL-R 7230	30	3000K/4000K/6000K	74	1000/1200 92 92
LSL-R 7240	40	3000K/4000K/6000K	74	2000/2400 92 92
LSL-R 7260	60	3000K/4000K/6000K	74	2000/2400 92 92

STRAPLINE 50 RECESSED

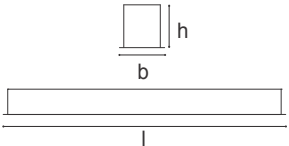


Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-R 5020	20	3000K/4000K/6000K	53.5	1000/1200 63 80
LSL-R 5030	30	3000K/4000K/6000K	53.5	1000/1200 63 80
LSL-R 5040	40	3000K/4000K/6000K	53.5	2000/2400 63 80
LSL-R 5060	60	3000K/4000K/6000K	53.5	2000/2400 63 80

STRAPLINE 35 RECESSED




Available in 3 colors

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSL-R 3520	20	3000K/4000K/6000K	992/1192 x 38	1000/1200 46.5 57
LSL-R 3540	40	3000K/4000K/6000K	1992/2392 x 38	2000/2400 46.5 57

MOON LIGHT T

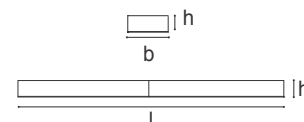


Available in 3 colors

Luminaires compatible with armstrong **TECHZONE** ceiling. Recessed single length individual luminaire, aluminium extruded natural anodised housing with matt finish extruded PMMA opal diffuser with uniform light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LML-T 6130	30	3000K/4000K/6000K	NA	1195 145 60
LML-T 6140	40	3000K/4000K/6000K	NA	1195 145 60

SLOT

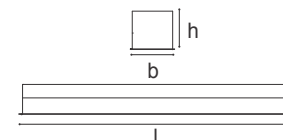


Available in 3 colors

Surface/Recessed mounting single length individual luminaire, aluminum extruded natural anodized housing with crystal clear PC. IP 65 product suitable for high moisture and water splash surrounding. High lumen output product gives desired lux at low wattage.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSA 10090	90	3000K/4000K/6000K	1169 x 102	1200 133 91
LSA 10100	100	3000K/4000K/6000K	1169 x 102	1200 133 91

ARCHITECTURAL LUMINAIRES

SLOT-D

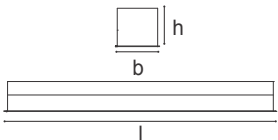


Available in 3 colors

Surface/Recessed mounting single length individual luminary, aluminum extruded natural anodized housing with PMMA diffuser. IP 65 product suitable for high moisture and water splash surrounding. High lumen output product gives desired lux at low wattage.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSA 11090	90	3000K/4000K/6000K	1169 x 102	1200 133 91
LSA 11100	100	3000K/4000K/6000K	1169 x 102	1200 133 91

SLOT-N

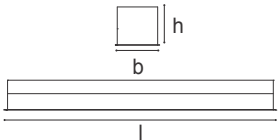


Available in 3 colors

Surface/Recessed mounting single length individual luminary, aluminum extruded natural anodized housing with click fit PMMA diffuser. IP 40 product suitable for high moisture and water splash surrounding. High lumen output product gives desired lux at low wattage.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSA 09040	40	3000K/4000K/6000K	1192 x 95	1200 103.5 90
LSA 09050	50	3000K/4000K/6000K	1192 x 95	1200 103.5 90
LSA 09060	60	3000K/4000K/6000K	1192 x 95	1200 103.5 90
LSA 09075	75	3000K/4000K/6000K	1192 x 95	1200 103.5 90

SLIT

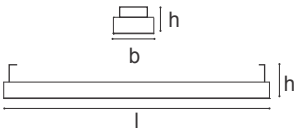


Available in 3 colors

Product designed and developed for IGI Terminal 3 of design suitable for double height ceiling with improved ingress protection. Product complies with all industry standards.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSA 15070	70	3000K/4000K/6000K	NA	1200 150 110


PILL 400 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-S 4130	30	3000K/4000K/6000K	NA	400 60


PILL 500 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-S 5145	45	3000K/4000K/6000K	NA	500 60

PILL 600 SUSPENDED




Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-S 6156	56	3000K/4000K/6000K	NA	600 60

ARCHITECTURAL LUMINAIRES


PILL 900 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-S 9180	80	3000K/4000K/6000K	NA	900 60


PILL 1200 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-S 12100	100	3000K/4000K/6000K	NA	1170 60


PILL 400 RECESSED



Round CRCA Die formed housing with opal thermoformed PMMA diffuser. High efficient LEDs for uniform light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-R 4230	30	3000K/4000K/6000K	NA	395 95


PILL 500 RECESSED



Round CRCA Die formed housing with opal thermoformed PMMA diffuser. High efficient LEDs for uniform light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-R 5245	45	3000K/4000K/6000K	NA	527 93


PILL 600 RECESSED



Round CRCA Die formed housing with opal thermoformed PMMA diffuser. High efficient LEDs for uniform light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ALP-R 6256	56	3000K/4000K/6000K	NA	635 93

RIPPLE 600




Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ARL 6030	30	3000K/4000K/6000K	NA	600 60

ARCHITECTURAL LUMINAIRES


RIPPLE 900



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ARL 9055	55	3000K/4000K/6000K	NA	900 60


RIPPLE 1200



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ARL 12080	80	3000K/4000K/6000K	NA	1170 60


HEXO



The extruded aluminium housing in hexagon shape with opal PMMA diffuser. High efficient LEDs for uniform light distribution.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l h
AHL 6040	40	3000K/4000K/6000K	NA	672 85


PILL-2.0 500 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
APP-S 4145	45	3000K/4000K/6000K	NA	500 60


PILL-2.0 600 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
APP-S 5156	56	3000K/4000K/6000K	NA	600 60

PILL-2.0 900 SUSPENDED




Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
APP-S 6180	80	3000K/4000K/6000K	NA	900 60

ARCHITECTURAL LUMINAIRES


PILL-2.0 1200 SUSPENDED



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
APP-S 12100	100	3000K/4000K/6000K	NA	1170 60


RIPPLE-2.0 600



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ARP 6030	30	3000K/4000K/6000K	NA	600 60


RIPPLE-2.0 900



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
ARP 9055	55	3000K/4000K/6000K	NA	900 60


RIPPLE-2.0 1200

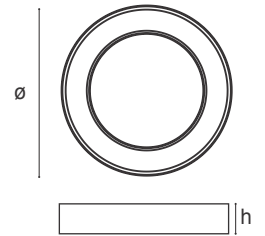

Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
ARP 12100	100	3000K/4000K/6000K	NA	1170 60


TRIO



Triangular extruded aluminium housing with soft corner and opal PMMA diffuser. High efficient LEDs for uniform light

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
ATL 3030	30	3000K/4000K/6000K	NA	511 465 88


LOW BAY

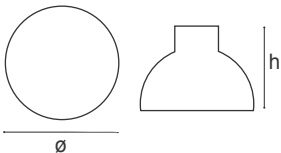

A decorative luminaire with high efficient COB for uniform light distribution. The fixture is available in different colors options.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LB 324	24	3000K/4000K/5700K	NA	455 280
LB 324	24	3000K/4000K/5700K	NA	380 227

D LITE

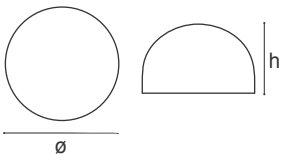


The decorative luminaire suitable for LED bulbs available in different color options.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LDTE 600	9, 12, 15	3000K/6000K	NA	600 320
LDTE 425	9, 12, 15	3000K/6000K	NA	425 210
LDTE 380	9, 12, 15	3000K/6000K	NA	373 205
LDTE 300	9, 12, 15	3000K/6000K	NA	305 185

*LED bulb cost extra as applicable

ZETA

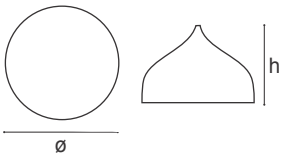


The decorative luminaire suitable for LED bulbs available in different color options.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LZTE 3010	9, 12, 15	3000K/6000K	NA	420 280
LZTE 3020	9, 12, 15	3000K/6000K	NA	368 280
LZTE 3030	9, 12, 15	3000K/6000K	NA	265 210

*LED bulb cost extra as applicable

MOLE

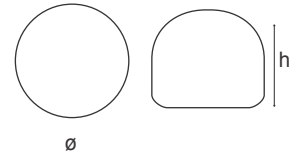


The decorative luminaire suitable for LED bulbs available in different color options.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LMOL 205	9, 12, 15	3000K/4000K/5700K	NA	205 175

*LED bulb cost extra as applicable

TOPE

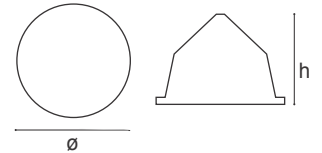

The decorative luminaire suitable for LED bulbs available in different color options.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø h
LTOP 405	9, 12, 15	3000K/6000K	NA	405 265

*LED bulb cost extra as applicable


OUR PROJECTS




Polyone and Polymers, Pune



Anand Rathi Financial Services, Pune

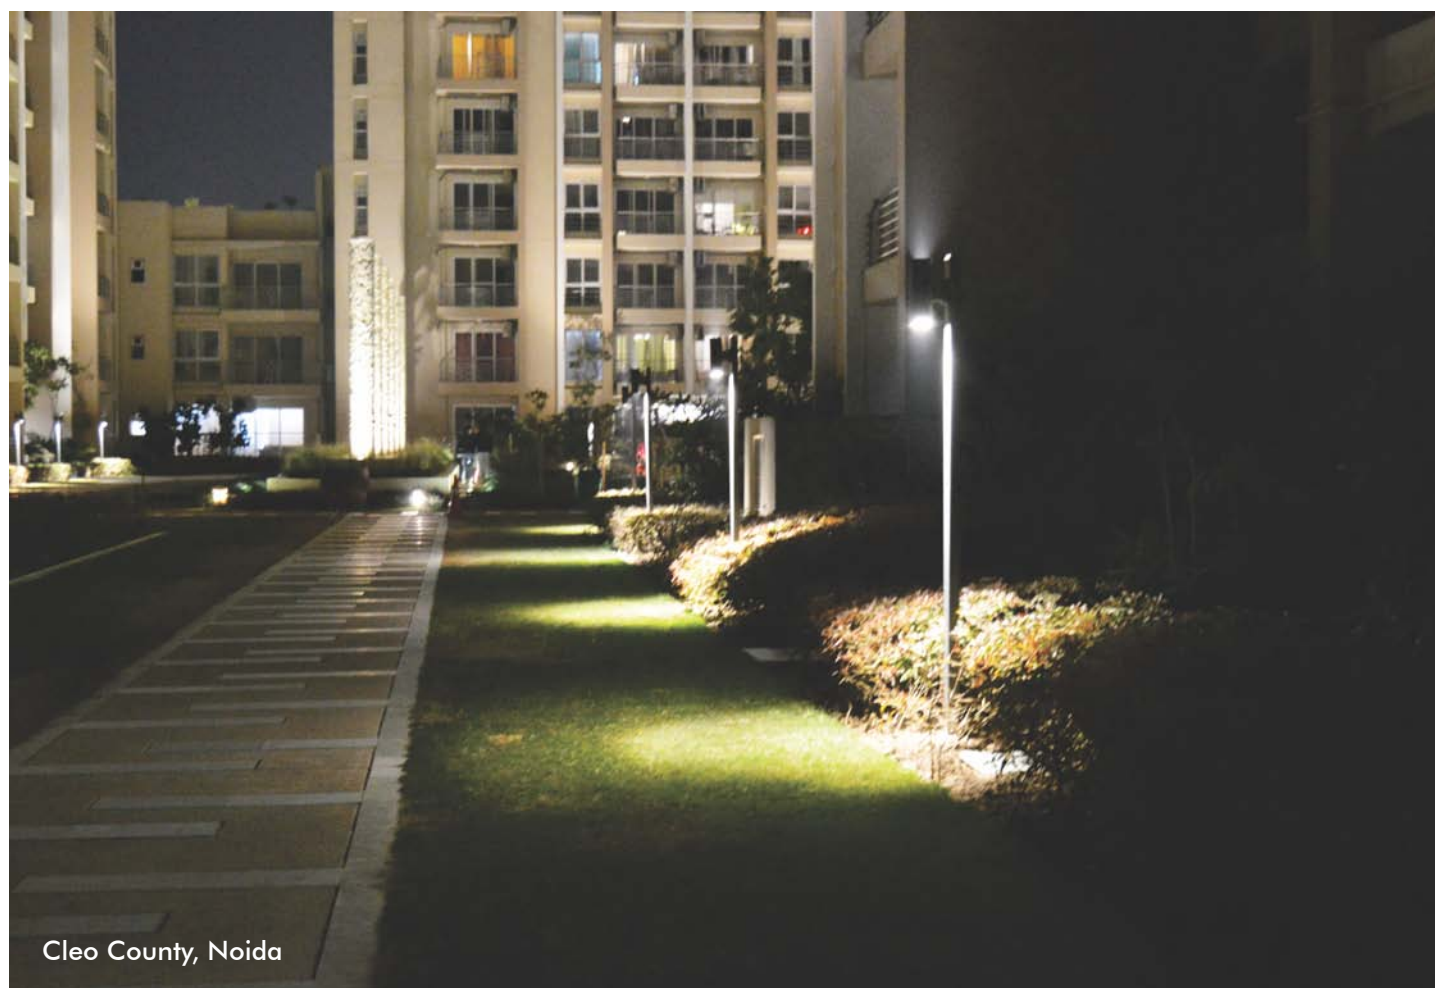


Cleo County, Noida

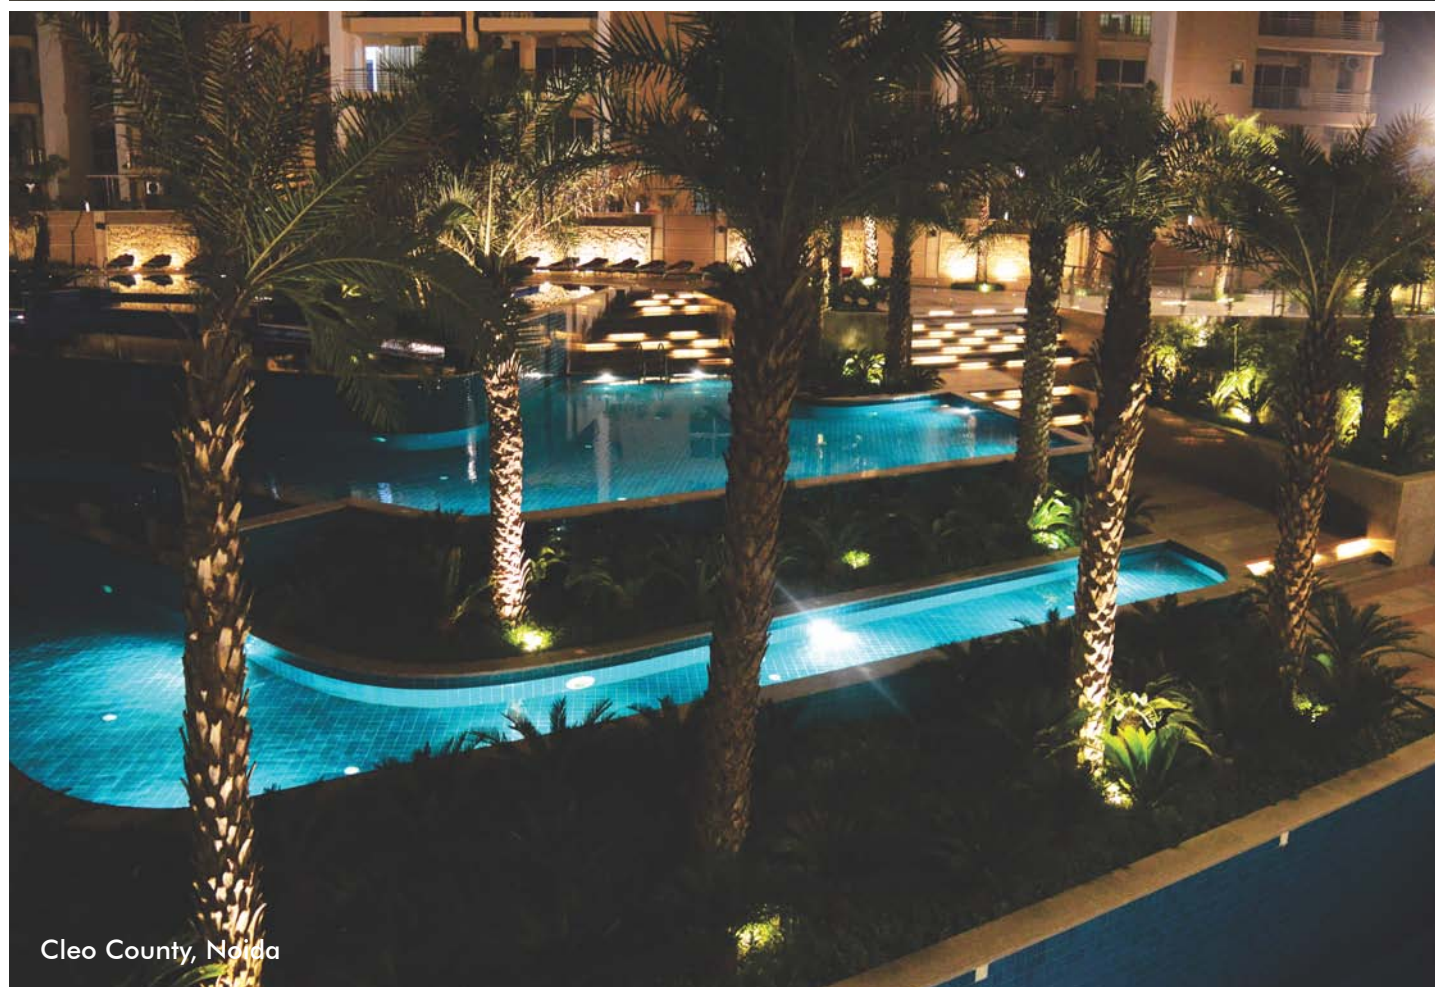

Cleo County, Noida

INDUSTRIAL LUMINAIRES

BLAZE +

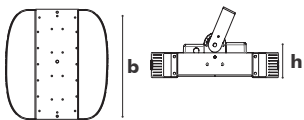


Available in 3 colors

The BLAZE+ modular Highbay delivers a flexible solution for any commercial and industrial application, with its customized LED Light module and various precision lens optics packages. Blaze+ comes with decorative design and multiple color option with a light efficacy of >140 lm/w. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBP 040	40	3000K/4000K/5700K	45°/60°/90°	205 230 100
LBP 050	50	3000K/4000K/5700K	45°/60°/90°	205 230 100
LBP 060	60	3000K/4000K/5700K	45°/60°/90°	205 230 100

BLAZE + 2

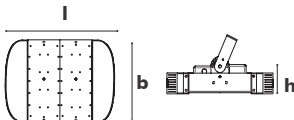


Available in 3 colors

The BLAZE+ 2 modular Highbay delivers a flexible solution for any commercial and industrial application, with its customized LED Light module and various precision lens optics packages. Blaze+ comes with decorative design and multiple color option with a light efficacy of >140 lm/w. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBP 080	80	3000K/4000K/5700K	45°/60°/90°	290 230 100
LBP 100	100	3000K/4000K/5700K	45°/60°/90°	290 230 100
LBP 120	120	3000K/4000K/5700K	45°/60°/90°	290 230 100

BLAZE + 3

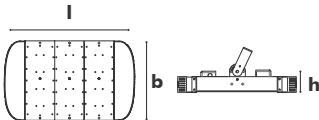


Available in 3 colors

The BLAZE+ 3 modular Highbay delivers a flexible solution for any commercial and industrial application, with its customized LED Light module and various precision lens optics packages. Blaze+ comes with decorative design and multiple color option with a light efficacy of >140 lm/w. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBP 150	150	3000K/4000K/5700K	45°/60°/90°	375 230 100
LBP 180	180	3000K/4000K/5700K	45°/60°/90°	375 230 100

BLAZE + 4

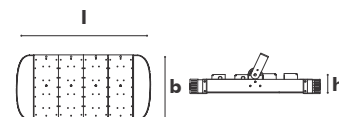


Available in 3 colors

The **BLAZE+ 4** modular Highbay delivers a flexible solution for any commercial and industrial application, with its customized LED Light module and various precision lens optics packages. Blaze+ comes with decorative design and multiple color option with a light efficacy of >140 lm/w. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBP 200	200	3000K/4000K/5700K	45°/60°/90°	460 230 100
LBP 240	240	3000K/4000K/5700K	45°/60°/90°	460 230 100

BLAZE

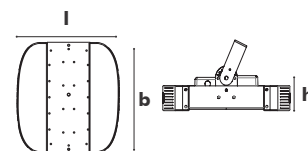


Available in 3 colors

The **BLAZE** modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 120 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBL 040	40	3000K/4000K/5700K	45°/60°/90°	205 230 100
LBL 050	50	3000K/4000K/5700K	45°/60°/90°	205 230 100
LBL 060	60	3000K/4000K/5700K	45°/60°/90°	205 230 100

BLAZE 2

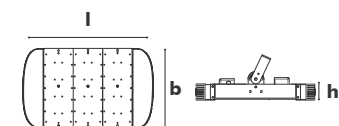


Available in 3 colors

The **BLAZE 2** modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 120 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBL 080	80	3000K/4000K/5700K	45°/60°/90°	290 230 100
LBL 100	100	3000K/4000K/5700K	45°/60°/90°	290 230 100
LBL 120	120	3000K/4000K/5700K	45°/60°/90°	290 230 100

INDUSTRIAL LUMINAIRES

BLAZE 3

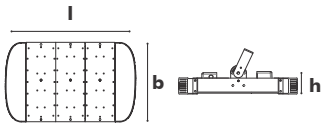


Available in 3 colors

The BLAZE 3 modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 120 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBL 150	150	3000K/4000K/5700K	45°/60°/90°	375 230 100
LBL 180	180	3000K/4000K/5700K	45°/60°/90°	375 230 100

BLAZE 4

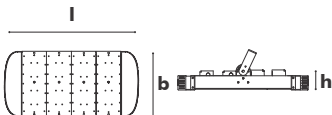


Available in 3 colors

The BLAZE 4 modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 120 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LBL 200	200	3000K/4000K/5700K	45°/60°/90°	460 230 100
LBL 240	240	3000K/4000K/5700K	45°/60°/90°	460 230 100


ROTO-LW

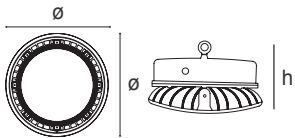

Elegant round Highbay luminaire design along with Modular Lens along with toughened glass which is designed to replace traditional Highbays. The system delivers simple, point to point replacement with easy installation methods of hook, pendants and brackets. Unique matt finish powder coating gives alluring look to the fixture. A Multi electronic driver in the housing provides extra performance and unique feature to the product.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) ø h
LRO 060	60	3000K/5700K/6500K	60°/90°	280 150
LRO 080	80	3000K/5700K/6500K	60°/90°	280 150
LRO 100	100	3000K/5700K/6500K	60°/90°	280 150


ROTO



Elegant round Highbay luminaire design along with Modular Lens is designed to replace traditional Highbays. The system delivers simple, point to point replacement with easy installation methods of hook, pendants and brackets. Unique matt finish powder coating gives alluring look to the fixture.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) Ø h
LRO 120	120	3000K/5700K/6500K	90°	318 250
LRO 150	150	3000K/5700K/6500K	90°	318 250

AXEL



Axel is an Innovative LED base well glass luminaire for direct replacement of 100W Conventional Fixture. Axel has the potential to save up to 60% of energy without compromising lighting parameters in the existing installation. Axel is widely used in various applications in diversified sector. It is developed by using advance technology and requisition tool in compliance with quality standards. Available in both opal & clear vandal resistant polycarbonate diffuser.

PRODUCT ID	WATT	CCT	Diffuser	DIMENSION (mm) Ø h
LAX-O 040	40	6500K	Opal	120 180
LAX-O 040	40	6500K	Clear	120 180

HARBOUR




HARBOUR IP 65 is a linear indoor product which is light in weight made of Polycarbonate body with frostate (milky) diffuser to give smooth & glare free light.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LHB 025	25	3000K/4000K/5700K	NA	1260 78 84
LHB 040	40	3000K/4000K/5700K	NA	1260 123 86

INDUSTRIAL LUMINAIRES


CLEAN ROOM

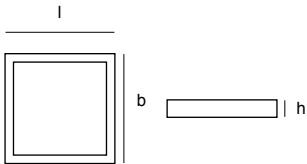

An IP 54 LED recessed grid ceiling luminaire Suitable for 600x600 module enclosed with high efficient diffuser to give the low glare and maximum efficiency. Bottom opening for ease in maintenance.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LCR 2345	45	3000K/4000K/5700K	NA	597 597 86


DURA



The Dura series brings the advantages of energy efficient and controllable lighting for industrial application with LED lamp source for long life.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LIF 3118	1x18	3000K/4000K/5700K	NA	1230 56 73
LIF 3236	2x18	3000K/4000K/5700K	NA	1230 110 78


SABER



The Saber T8 retrofit brings the advantages of energy efficient and controllable lighting for industrial application with LED lamp source for long life. Easy installation with one side as well as two side connection provide a convenient replacement to conventional retrofit.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) l b
LRT-T8-018	18	3000K/4000K/5700K	NA	1205 28
LRT-T8-020	20	3000K/4000K/5700K	NA	1205 28


PICTOR

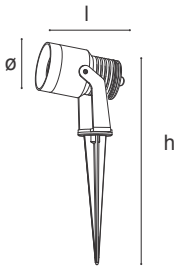

An ultra compact, IP 66, LED light luminaire. Its corrosion proof, die cast aluminium composite construction makes it ideal for the harshest corrosive environment. Spike available to ease the installation.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø l h
LSO 3007	7	3000K	NA	75 138 245
LSO 3010	10	3000K	NA	75 138 245


KUBE

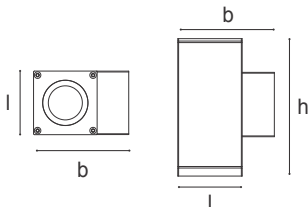

Wall mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSO 3207	7	3000K/4000K/5700K	NA	80 120 192
LSO 3212	12	3000K/4000K/5700K	NA	80 120 192
LSO 3215	15	3000K/4000K/5700K	NA	80 120 192

KUBE
UP & DOWN

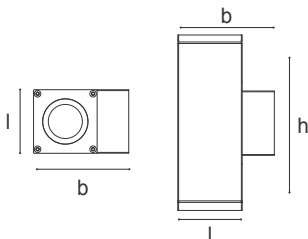


Wall mounted IP 65 up-down luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminiare is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSO 3314	2x7	3000K/4000K/5700K	NA	80.2 115.1 197.8
LSO 3324	2x12	3000K/4000K/5700K	NA	80.2 120.1 237.8
LSO 3330	2x15	3000K/4000K/5700K	NA	80.2 120.1 237.8

OUTDOOR LUMINAIRES


KUBE SURFACE



Ceiling mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) l x b	DIMENSION (mm) l b h
LSO 3407	7	3000K/4000K/5700K	NA	80 80 186
LSO 3412	12	3000K/4000K/5700K	NA	80 80 186
LSO 3415	15	3000K/4000K/5700K	NA	80 80 186


OREON

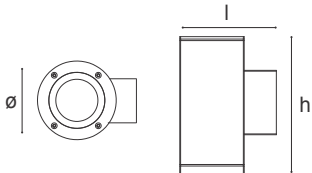

Wall mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø l h
LCO 4407	7	3000K/4000K/5700K	NA	80 115 192
LCO 4412	12	3000K/4000K/5700K	NA	80 115 192
LCO 4415	15	3000K/4000K/5700K	NA	80 115 192


OREON UP & DOWN

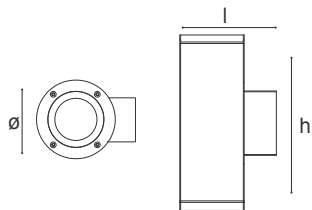

Wall mounted IP 65 up-down luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) Ø	DIMENSION (mm) Ø l h
LCO 4514	2x7	3000K/4000K/5700K	NA	80.2 115 200
LCO 4524	2x12	3000K/4000K/5700K	NA	80.2 115 240
LCO 4530	2x15	3000K/4000K/5700K	NA	80.2 115 240


OREON SURFACE



Ceiling mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LCO 4307	7	3000K/4000K/5700K	NA	80 186
LCO 4312	12	3000K/4000K/5700K	NA	80 186
LCO 4315	15	3000K/4000K/5700K	NA	80 186


SIA



IP 65 SIA (bulk head) light is integrated with high efficient LEDs with milky diffuser covering. The fixture has integrated driver and is easy on maintenance.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LBH 0012	12	6000K	NA	189 109 75

VOLA




IP 65 Die Cast Aluminum Housing. Horizontal vertical scoop Step Light designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters with separate GI box enclosure & integrated driver.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LOD 2009	9	3000K	NA	200 115 67

OUTDOOR LUMINAIRES


BRICK



IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LOD 3004	4	3000K/4000K/6000K	87.1 x 87.1	99 99 61
LOD 3006	6	3000K/4000K/6000K	87.1 x 87.1	99 99 61

LOCUS 2



IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LOD 3109	9	3000K/4000K/6000K	195 x 86	200 90 48


VOLANS



IP 67 in-ground uplight in die-cast aluminium housing and stainless steel cover with Integrated driver.


PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LOD 4003	3	3000K	70	80 90

ELAVA

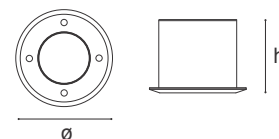

IP 67 in ground LED luminaire die cast housing stainless steel cover, anti-corrosion resistant, tempered clear glass with optical lens & Integrated driver.


PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LOD 44503	3	3000K/4000K/5700K	38	50 80
LOD 44506	6	3000K/4000K/5700K	70	85 120
LOD 44509	9	3000K/4000K/5700K	70	85 120
LOD 44512	12	3000K/4000K/5700K	95	130 120
LOD 44515	15	3000K/4000K/5700K	110	150 110
LOD 44518	18	3000K/4000K/5700K	110	150 110
LOD 44525	25	3000K/4000K/5700K	110	150 110



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LBM 7009	9	3000K/5700K	NA	150 745

FERN




IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LBF 7012	12	3000K/5700K	NA	122 750

OUTDOOR LUMINAIRES


TORCH

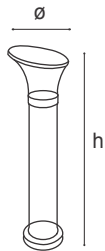

IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LBT 7012	12	3000K/5700K	NA	175 757


POLO



IP 65 LED post top lights for outdoor illumination made in die cast aluminium housing of high purity sheet electrochemically polished & anodized with deep drawn POT optics.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LBP 6515	15	3000K/5700K	104	218 670


RING



IP 65 LED post top lights for outdoor illumination made in aluminium die-cast housing of purity sheet electrochemically polished & anodized with deep drawn POT optics.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LPT 4545	45	3000K/5700K	NA	575 385
LPT 6560	60	3000K/5700K	NA	575 385


RING MINI



IP 65 LED post top lights for outdoor illumination made in aluminium die-cast housing of purity sheet electrochemically polished & anodized with deep drawn POT optics.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LPR 5530	30	3000K/5700K	NA	430 385


MARSHALL



IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LPM 4540	40	3000K/5700K	NA	450 520

BOLT




IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) ø h
LPB 4045	45	3000K/5700K	NA	450 680

OUTDOOR LUMINAIRES


TITAN

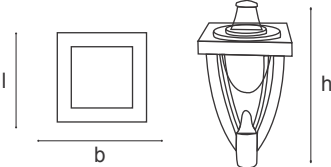

IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in die-cast aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LPT 3045	45	3000K/5700K	NA	315 315 690


ASTRA-LW

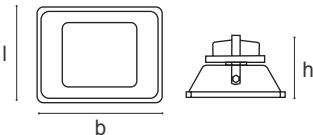

ASTRA-LW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w and a warranty of 3 years.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LAS 0030	30	3000K/5700K	60°/90°	182 143 102
LAS 0050	50	3000K/5700K	60°/90°	182 143 102


ASTRA-MW

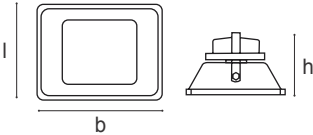

ASTRA-MW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w and a warranty of 3 years.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LAS 0100	100	3000K/5700K	60°/90°	280 228 150
LAS 0150	150	3000K/5700K	60°/90°	280 228 150


ASTRA-HW

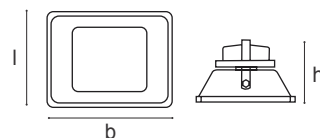

ASTRA-HW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w and a warranty of 3 years.

PRODUCT ID	WATT	CCT	BEAM ANGLES	DIMENSION (mm) l b h
LAS 0200	200	3000K/5700K	60°/90°	388 290 155
LAS 0250	250	3000K/5700K	60°/90°	425 328 178
LAS 0300	300	3000K/5700K	60°/90°	425 328 178
LAS 0350	350	3000K/5700K	60°/90°	515 328 178
LAS 0400	400	3000K/5700K	60°/90°	515 328 178


SERA



IP 66 LED flood light with Elegant squarish design with clear toughened glass. Powder coated finish with cradle mounting facility.

PRODUCT ID	WATT	CCT	CUTOUT (mm) ø	DIMENSION (mm) l b h
LRS 3030	30	3000K/5700K	NA	204 164.7 53.5
LRS 3050	50	3000K/5700K	NA	204 164.7 53.5
LRS 3075	75	3000K/5700K	NA	296 58 245
LRS 3100	100	3000K/5700K	NA	296 58 245

VISTA




Legero new aesthetically designed Street light with **High Power LED** and **Back driver opening** comes with all the options suitable for lighting outdoor application. Wider spread angle of lens provide extra coverage of light on roads. Aluminium Die cast Housing with unique heat sink fins structure provides thermal management to natural convection. This IP 66 product powered by high efficient LED chip to give the best lumen output of 110 lm/w.

PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm) l b h
LSV 1045	45	5700K	50	382 178 100
LSV 1060	60	5700K	50	382 178 100

OUTDOOR LUMINAIRES


BENTO-LW

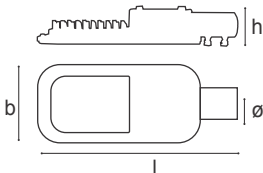

IP 66 LED street light with high pressure aluminium die cast body and toughened glass. Powered with high efficacy LED chips to give the best output.

PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm) l b h
LRS 99020	20	5700K	40	330 96 56
LRS 99030	30	5700K	40	330 96 56
LRS 99040	40	5700K	40	265 124 56


BENTO-MW

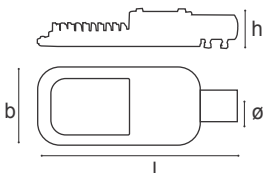

IP 66 LED street light with high pressure aluminium die cast body and toughened glass. Powered with high efficacy LED chips to give the best output. Back driver opening suitable for easy replacement.

PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm) l b h
LRS 99060	60	5700K	40	332 140 86
LRS 99100	100	5700K	50	400 195 100


CLEO-LW

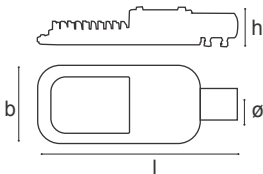

IP 66 LED street light with high pressure aluminium die cast body and toughened glass. Powered with high watt LED chips to give the best output. Wider spread angle of lens with toughened glass provide extra coverage of light on road.

PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm) l b h
LCL 0024	24	5700K	40	330 96 56
LCL 0036	36	5700K	40	265 124 56
LCL 0045	45	5700K	40	265 124 56


CLEO



Unique designed Street light with High Power LED and Back driver opening comes with all the options suitable for lighting outdoor application. Wider spread angle of lens with toughened glass provide extra coverage of light on roads. Aluminium Die cast Housing with unique heat sink fins structure provides thermal management to natural convection. This IP 66 product comes with fixture efficacy of 125 lm/w and a warranty of 3 years.

PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm)		
				l	b	h
LCL 0060	60	5700K	40	332	140	86
LCL 0072	72	5700K	50	400	195	100
LCL 0090	90	5700K	50	400	195	100
LCL 0110	110	5700K	50	400	195	100
LCL 0140	140	5700K	60	440	230	108
LCL 0190	190	5700K	60	502	257	108

LEDRA

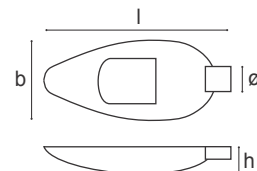

IP 66 LED street light with high pressure aluminium die cast body and toughened glass. Powered with high efficacy LED chips and lenses to give the best output.


PRODUCT ID	WATT	CCT	POLE DIA (mm) ø	DIMENSION (mm)		
				l	b	h
LSL 10075	75	5700K	64	725	305	146
LSL 10120	120	5700K	64	895	370	189

ACCESSORIES

FRAME 1x4



FRAME 2x2



SUSPENSION KIT (For Strapline)



SUSPENSION KIT



U CLAMP



Delhi International Airport T-3, Delhi



Heritage Nepal



Kaveri Inn, Kathmandu



Crowne Imperial Hotel, Kathmandu


OUR PROJECTS



Krishna Medical College, Karad



Offline Club, Ahmedabad

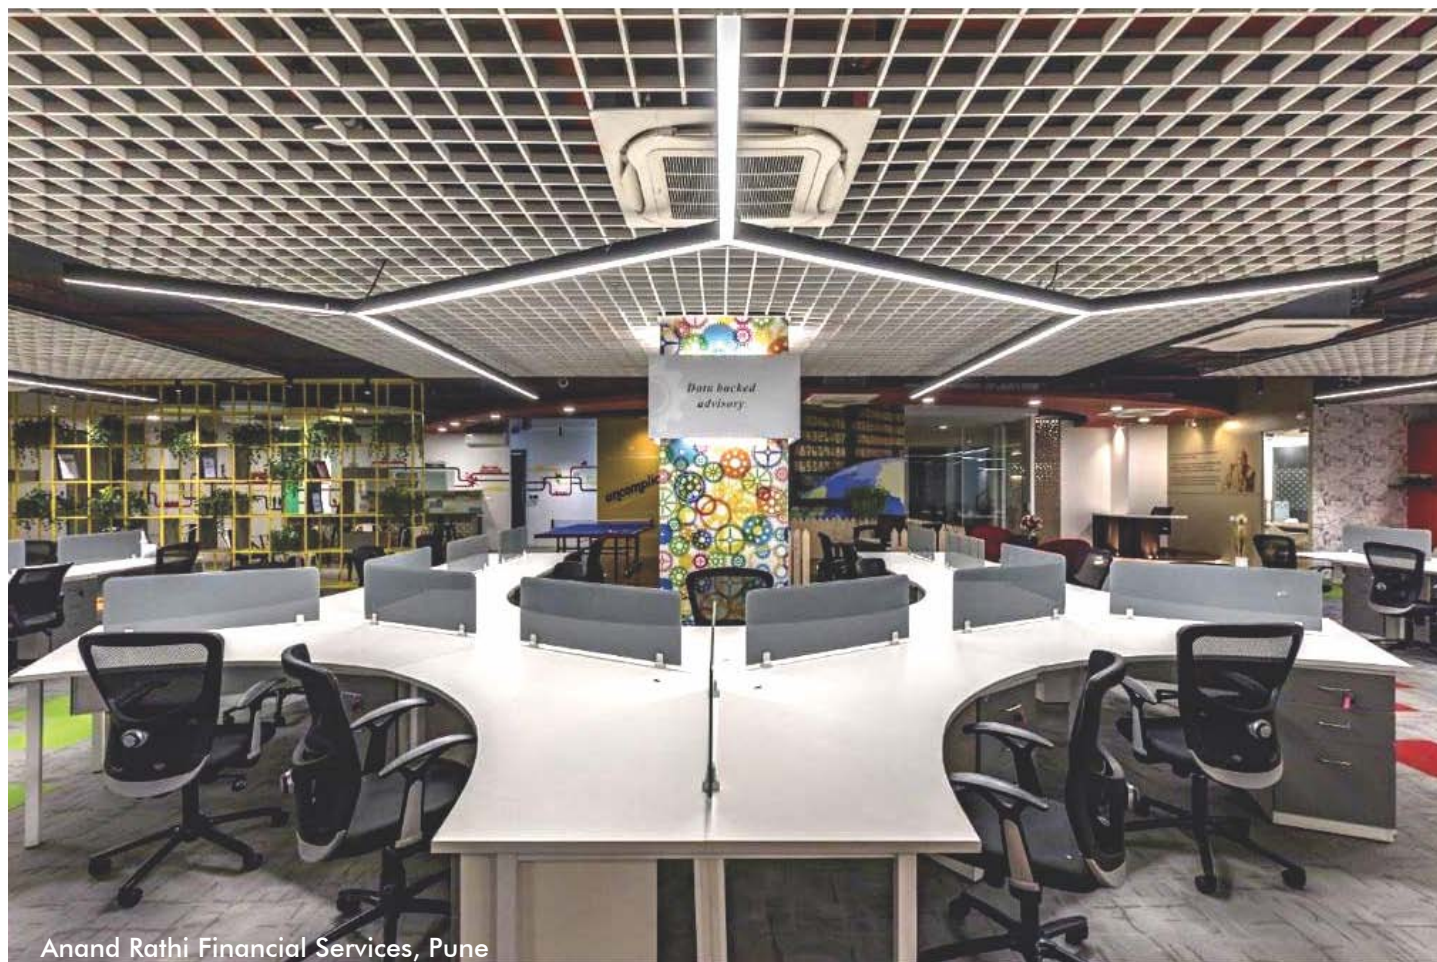

Anand Rathi Financial Services, Pune




Polyone & Polymers, Pune



OUR PROJECTS



Coca Cola, Bangalore

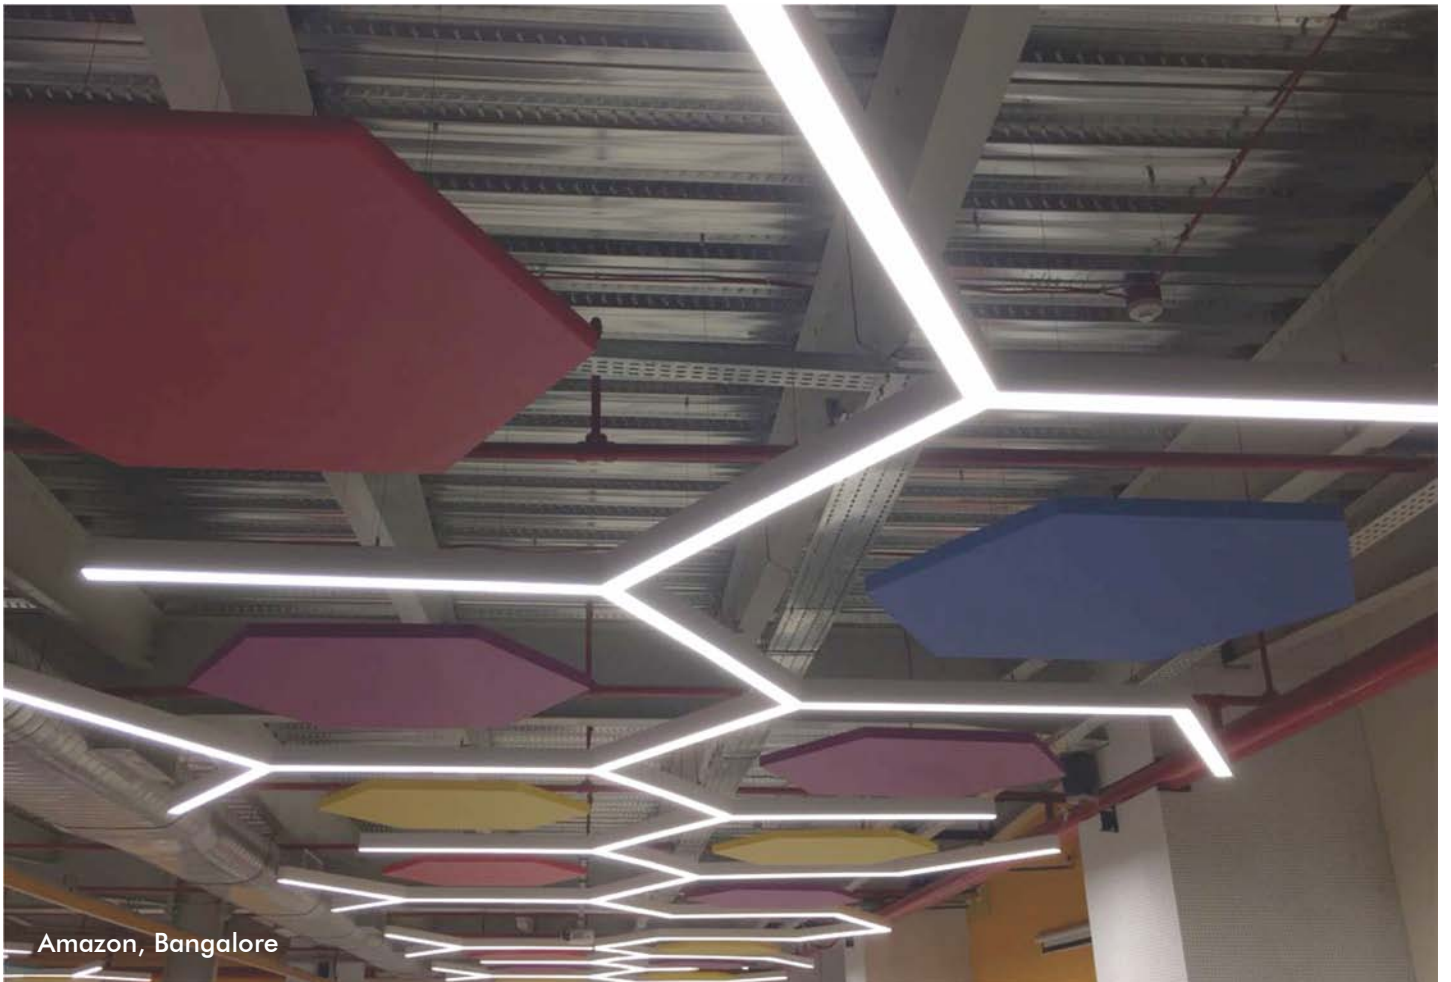

Amazon, Bangalore

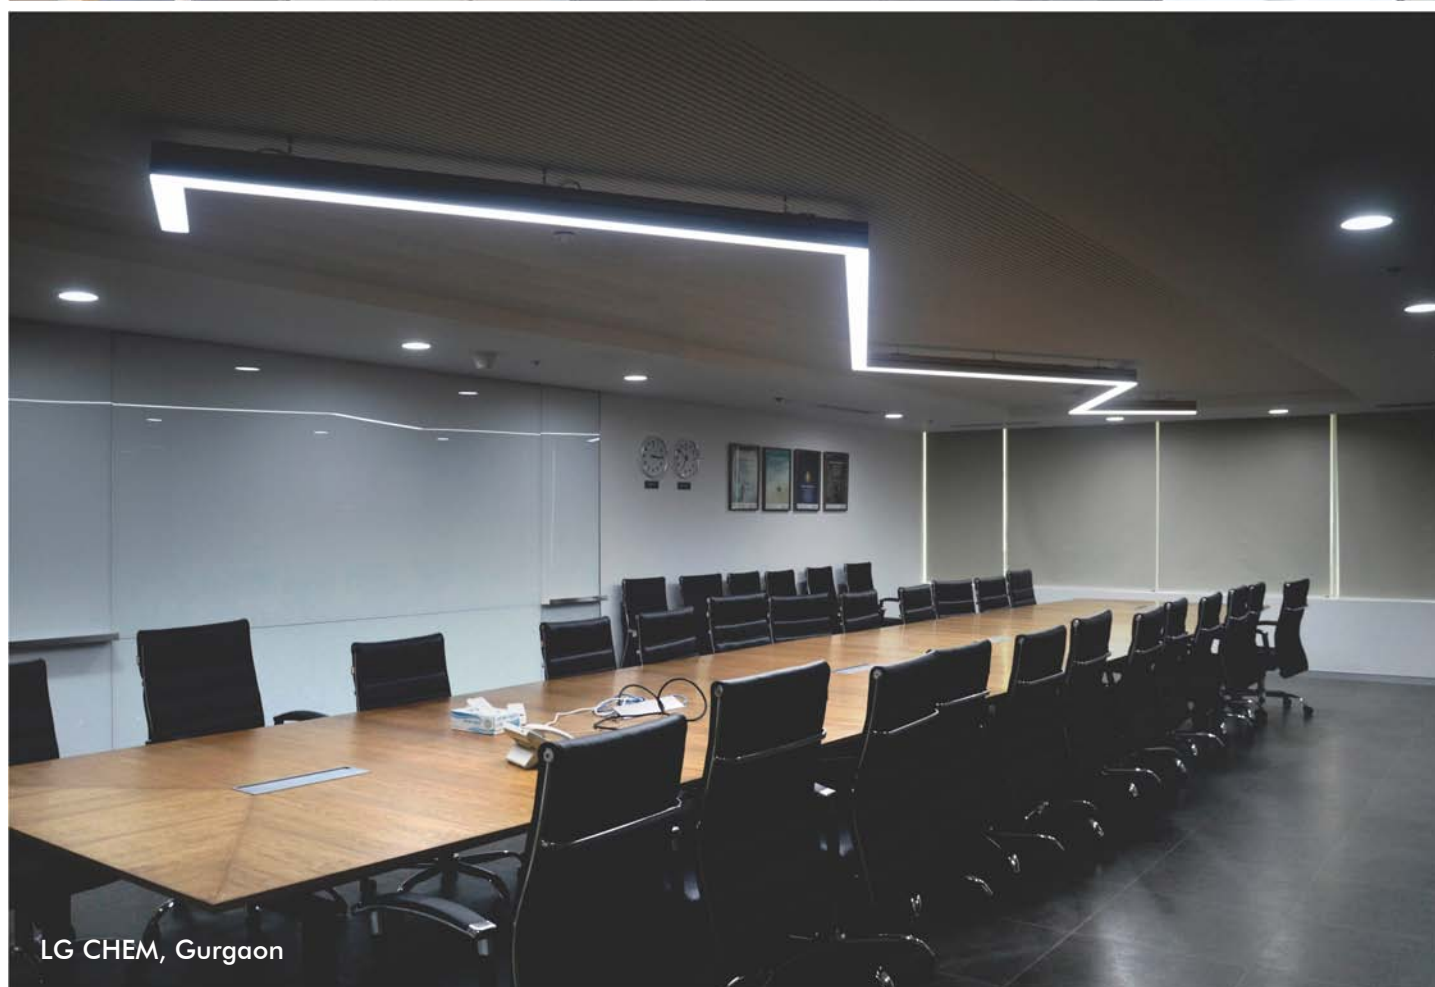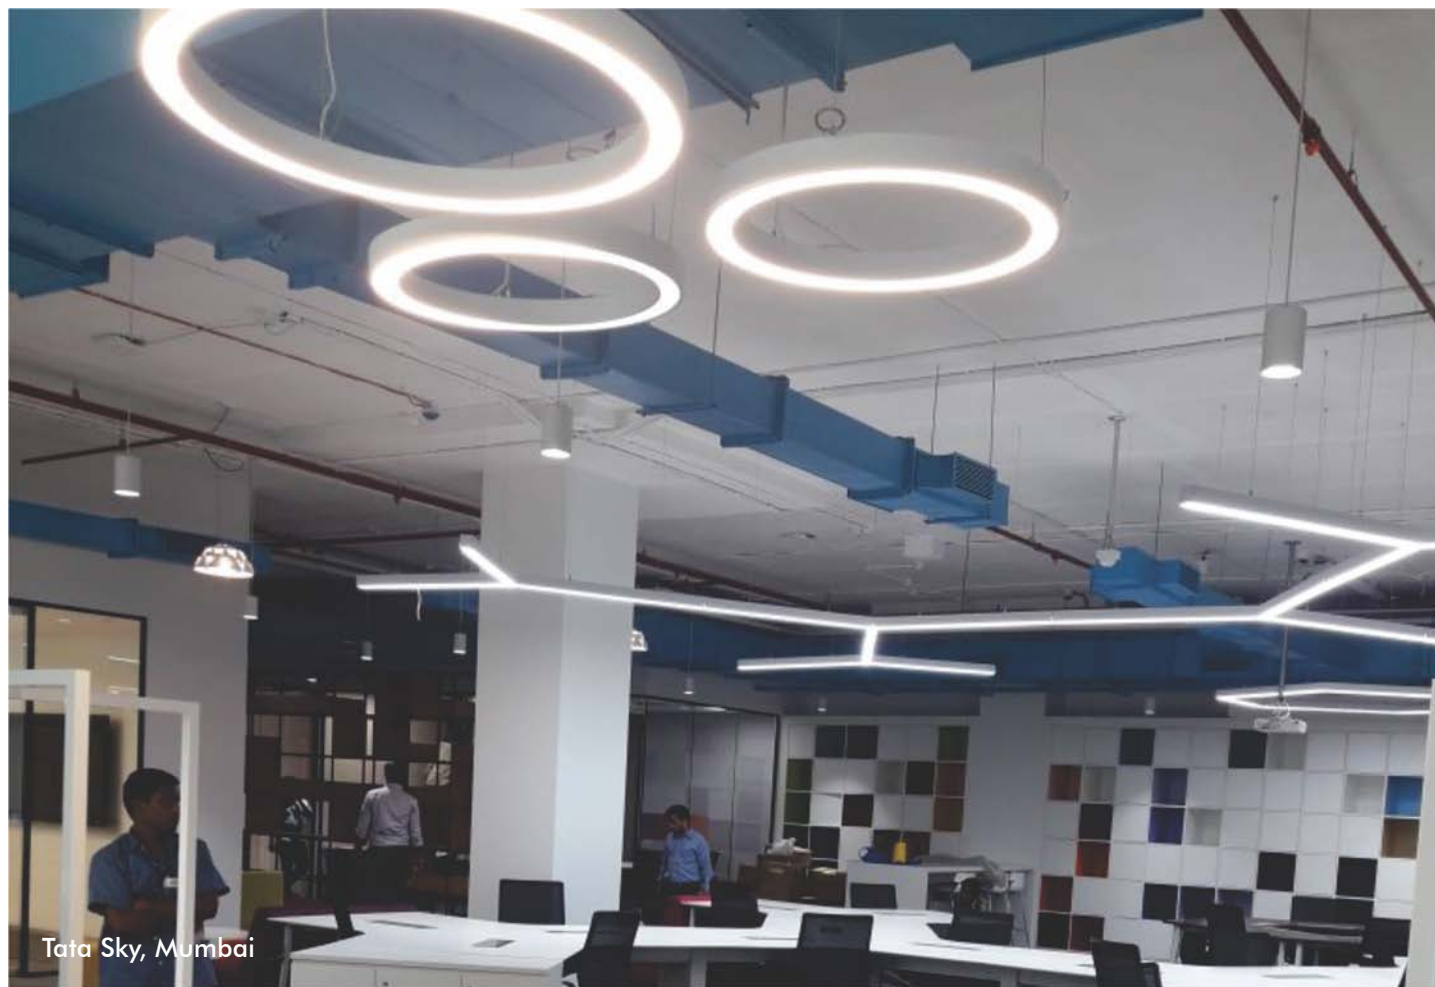

PRIVATE

- DELHI INTERNATIONAL AIRPORT TERMINAL-3 ○ HUL ○ COOPER ○
- PRAVIN MASALA ○ THYSSENKRUPP ○ INDIANA GRATINGS ○ PIAGGIO ○
- ARISTOCRAT ○ DELOITTE ○ HAWAS MEDIA ○ WILEY ○ PWC ○ IBIBO ○
- SCHNEIDER ○ AMAZON ○ ZOMATO ○ FREECHARGE ○ COCA-COLA ○
- AIRBNB ○ RENEW POWER ○ MAKEMYTRIP ○ REGUS ○ IIFL ○ PIRAMAL ○
- PVR ○ ERICSSON ○ QUICKHEAL ○ CANON ○ ADANI ○ VML ○ PAYTM ○
- SODEXO ○ 9A BUSINESS ○ HAWORTH ○ HP ○ BAE ○ AUTODESK ○ TCS ○
- PEARL ACADEMY ○ SAMSUNG ○ TATA MOTORS ○ ADITYA BIRLA ○ TATA SKY ○
- SOMANY ○ KALPATARU ○ ACCENTURE ○ WESTERN UNION ○ LEGATO ○
- SABA SOFTWARE ○ E-ZEST ○ COX & KINGS ○ MAX ○ ATHENA ○ GLG ○
- WINDSOR IT PARK ○ ERICSSON ○ ITTPL ○ MANIPAL HOSPITAL ○ GROHE ○
- DELHI GYMKHANA ○ EON IT PARK KHARADI ○ AZURE ○ SAS ○ TIBCO ○
- DECCAN GYMKHANA ○ EDIFECs ○ BIRLASOFT ○ LG CHEM ○ MARKIT ○
- CLEO COUNTY ○ VALUE PLUS ○ SIRION LAB ○ MOTT & MACDONALD ○
- GODREJ ○ JAISPRING ○ IZENICA ○ DALMIA ○ CLAIRVOLEX ○ AIRTEL ○
- CLIX CAPITAL ○ APCER ○ CLIFFORD ○ CINEPOLIS ○ APOLLO TYRES ○
- BAJAJ CAPITALS ○ BROWSER STACK ○ CORNING ○ UPES BIDHOLI ○
- SONY ○ KAS ○ INDIABULLS ○ CSGI ○ LOHIA GROUP ○ BAJAJ ○
- FREECHARGE ○ RAYMOND ○ BKT ○ PEARSON ○ DIVERSE LYNX ○
- JAIPURIA SCHOOL ○ VARSA PLASTIC ○

GOVERNMENT

- DELHI INTERNATIONAL AIRPORT TERMINAL-3 ○ BHARAT PETROLEUM ○
- GOVERNMENT COLLEGE, HARYANA ○ INDIAN RAILWAY ○ RAPID METRO ○
- HARYANA HIGH COURT ○ PHOOL BAGH ○ PUNJAB HOUSING BOARD ○
- CIRCUIT HOUSE ○ RAJIV GANDHI CANCER INSTITUTE & RESEARCH CENTRE ○
- SIR GANGA RAM HOSPITAL ○ SHATABDI SUPER SPECIALITY HOSPITAL ○
- UTTAR PRADESH RAJKIYA NIRMAN NIGAM LTD. ○ PWD HARYANA ○
- KANPUR DEVELOPMENT AUTHORITY ○ TAJ CORRIDOR ○ MINI SECRETARIAT ○



OUR NETWORK

Corporate Office
Regional Office
Distribution Channel

: Noida

: Pune

National

: (North) Delhi, Amritsar, Ludhiana, Chandigarh, Agra, Lucknow, Faridabad, Jaipur.

: (East) Kolkata

: (South) Hyderabad, Bengaluru, Chennai, Coimbatore, Calicut, Kochi, Madurai, Hyderabad, Vijayawada.

: (West) Ahmedabad, Jalgaon, Aurangabad, Ahmednagar, Mumbai, Pune, Kolhapur, Goa.

International

: Nepal

Terms & Conditions

- All products may vary from the photographs shown in this catalogue. Although every effort has been made to ensure accuracy in the compilation of the technical details in this publication.



CORPORATE OFFICE

LEGERO LIGHTING INDIA PVT. LTD.
E-139, Sector 63, Noida – 201301, India
Phone: +91 120 4272775
Email: info@legerolighting.com
www.legerolighting.com

Brighter *by Design*