


# Legero

## The future through our lenses

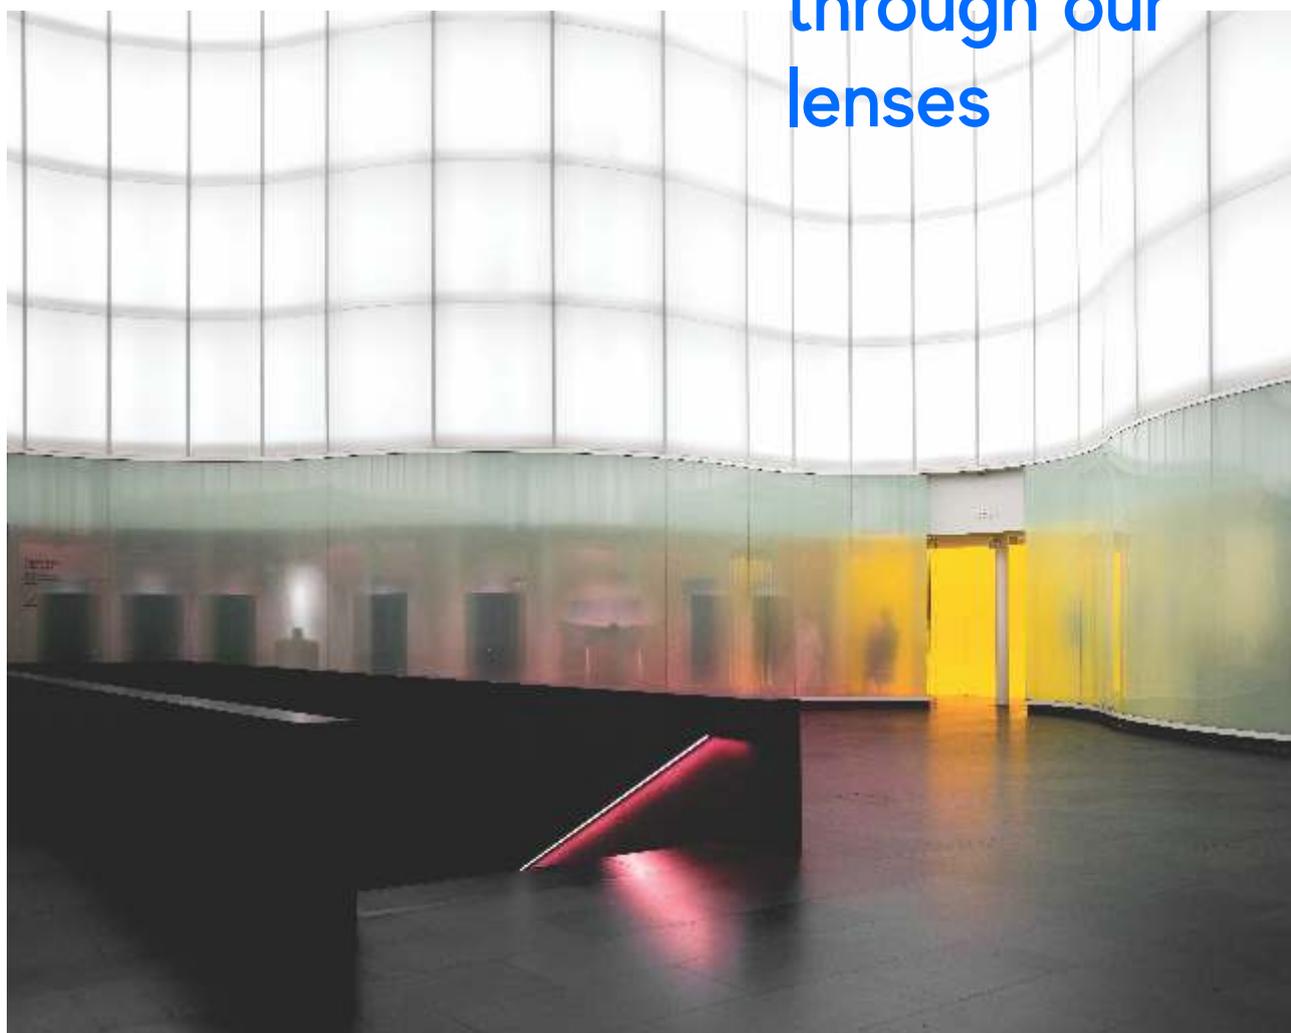

Architectural Luminaires  
Decorative Luminaires  
Industrial Luminaires  
Outdoor Luminaires

Price List  
January 2020


[legerolighting.com](http://legerolighting.com)

**We are a lighting solutions company.  
While at the same time, we are more than that.**

# LegeroLighting

Like everything in nature is constantly evolving, we as a Lights manufacturing company too are evolving incessantly.

With over a decade of experience alongside the extremely creative and dynamic teams both internally and externally, we have now developed a clear understanding of what it means to provide lighting solutions.

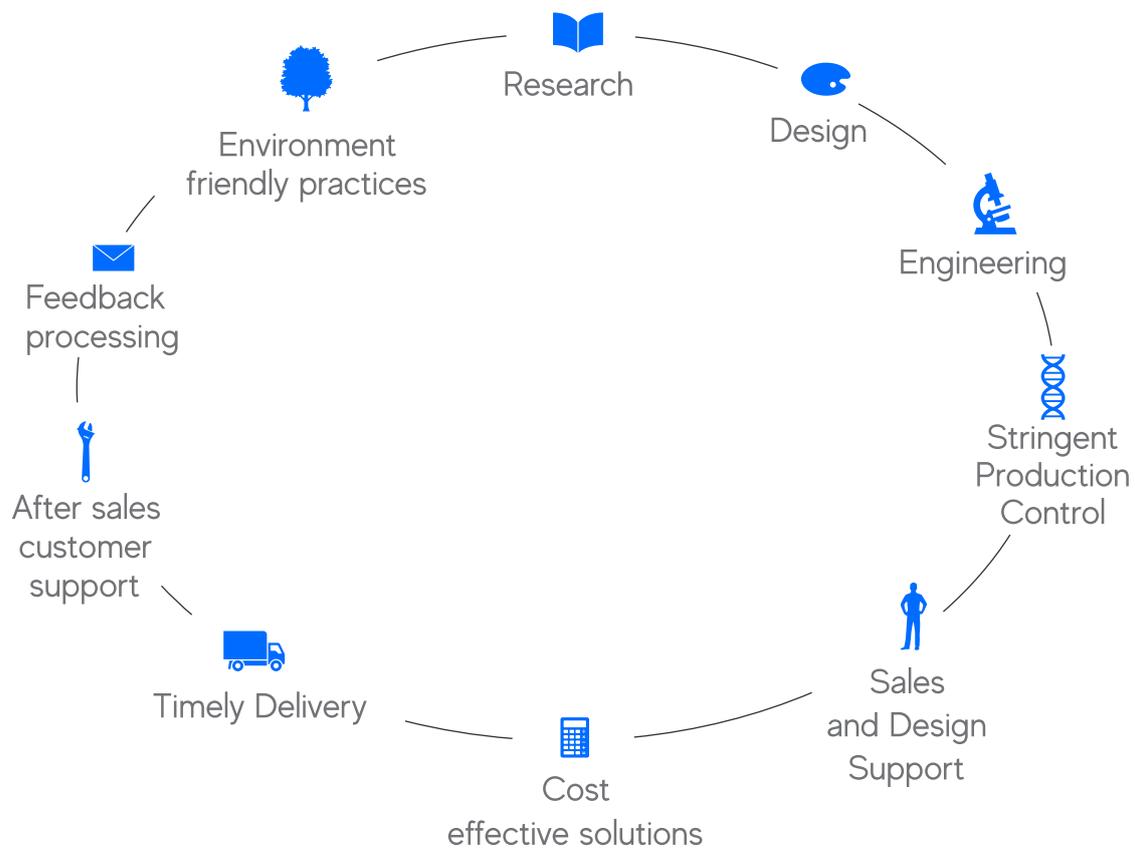


Our focus is to provide a large range of standard and custom-made solutions to meet the need of distinctive projects.

If it has been designed or even imagined, we aim to create the solutions and ensure it has served the space in the best way possible.

Simply put, we are just not a catalogue of products, we are your extended team striving to achieve perfection in every project.

**Made In India**

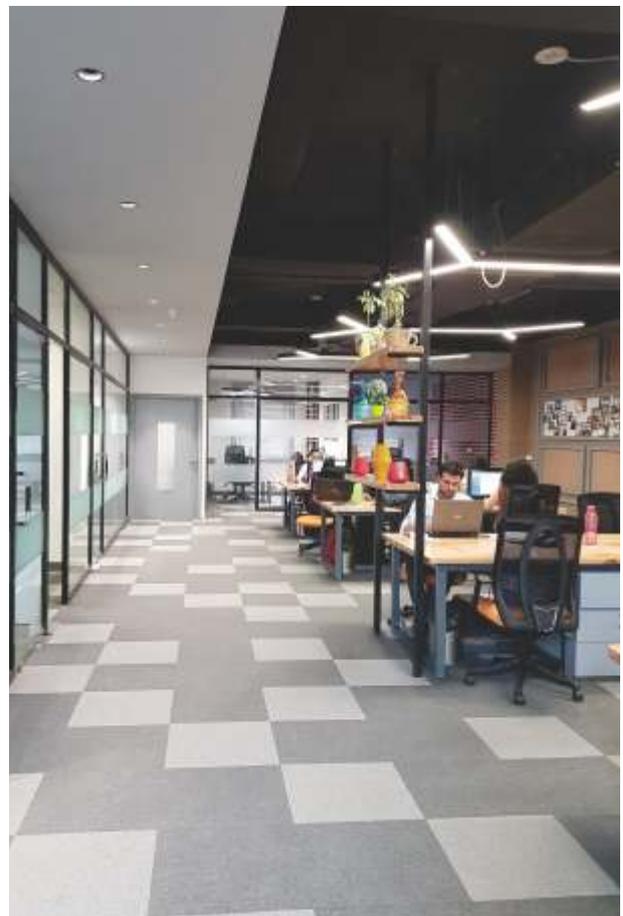

## Brighten up spaces

Our solutions have lit up offices, industrial and commercial spaces, outdoors and consumer areas. We are constantly looking at ways to improve the end users' quality of life, and not just meet, but exceed our customers' expectations.

## Our products:

Resessed Downlights	—————	1-5
Surface & Suspended Downlights	—————	6-10
Surface Mounted Luminaires	—————	11-12
Recessed Luminaires	—————	13-15
Surface & Suspended Luminaires	—————	16-17
Architectural Luminaires	—————	18-25
Decorative Luminaires	—————	28
Industrial Luminaires	—————	29-31
Outdoor Luminaires	—————	32-39


### Omega



A versatile collection of energy efficient round LED downlight for general lighting in various applications. These recessed diffused round LED downlights are made of high efficient die-cast aluminium housing with high transmission factor PMMA.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LVT 6507	7	3000K/4000K/6000K	102	112   53
LVT 6509	9	3000K/4000K/6000K	134	145   53
LVT 6512	12	3000K/4000K/6000K	134	145   53
LVT 6515	15	3000K/4000K/6000K	164	174   60
LVT 6518	18	3000K/4000K/6000K	164	174   60
LVT 6522	22	3000K/4000K/6000K	164	174   60

Available Colors ○




### Brillo



Collection of energy efficient square LED downlighter with housing made up of die-cast aluminium & high transmission factor PMMA sheet.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LDT 7507	7	3000K/4000K/6000K	85 x 94	100   100   51
LDT 7515	15	3000K/4000K/6000K	146 x 146	154   154   62
LDT 7518	18	3000K/4000K/6000K	146 x 146	154   154   62
LDT 7522	22	3000K/4000K/6000K	146 x 146	154   154   62

Available Colors ○




### Atmos



Sleek round backlit LED down light made up of die-cast housing & light weight plastic trim which is designed as a reflector to give high lumen efficacy. Also opal PMMA diffuser is so fixed in inner periphery of trim to cut down the glare & provide uniform light output.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LAT 010	10	3000K/4000K/6000K	110	126   40
LAT 013	13	3000K/4000K/6000K	110	126   40
LAT 016	16	3000K/4000K/6000K	140	160   40
LAT 020	20	3000K/4000K/6000K	140	160   40

Available Colors ○




### Stella



Recessed adjustable COB downlight in circular shape, made of die cast aluminium housing and has robust heat sink for excellent thermal management. It consist of high efficiency aluminium reflector to produce excellent light output.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 5508	8	3000K/4000K/6000K	50°	93	105   65
LHR 5512	12	3000K/4000K/6000K	50°	93	105   65
LHR 5514	14	3000K/4000K/6000K	50°	93	105   65

Available Colors ○




### Sol



Recessed COB down light made of die cast aluminum housing and robust heat sink for excellent thermal management. It consists of high efficiency aluminum reflector to produce excellent light output.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 5608	8	3000K/4000K/6000K	50°	94	105   101
LHR 5612	12	3000K/4000K/6000K	50°	94	105   101
LHR 5614	14	3000K/4000K/6000K	50°	94	105   101

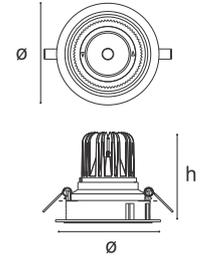


Available Colors

### Orbis



The COB spot light with softly contoured aluminium reflector and energy efficient light source that combines to produce a luminaire of exceptional style and performance.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LRS 7008	8	3000K/4000K/6000K	50°	70	82   79
LRS 7012	12	3000K/4000K/6000K	50°	70	82   79
LRS 7014	14	3000K/4000K/6000K	50°	70	82   79
LRS 7018	18	3000K/4000K/6000K	50°	117	125   95
LRS 7022	22	3000K/4000K/6000K	50°	117	125   95

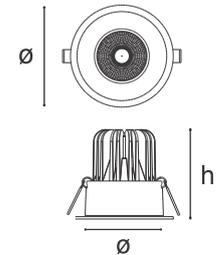


Available Colors

### Iris



Unique and exciting range of exceptionally trimless recessed COB spot lights. It consist of high efficiency aluminium reflector to produce excellent light output. Fixture is made of die-cast aluminium powder coated housing.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 5808	8	3000K/4000K/6000K	45°	110	115   125
LHR 5812	12	3000K/4000K/6000K	45°	110	115   125
LHR 5814	14	3000K/4000K/6000K	45°	110	115   125

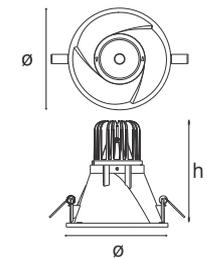


Available Colors

### Iris-D



Unique and exciting range of exceptionally trimless recessed diffuse light. It consist of high efficiency Diffuser. Fixture is made of die-cast aluminium powder coated housing.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 5108	8	3000K/4000K/6000K	70°	110	115   126
LHR 5112	12	3000K/4000K/6000K	70°	110	115   126
LHR 5114	14	3000K/4000K/6000K	70°	110	115   126

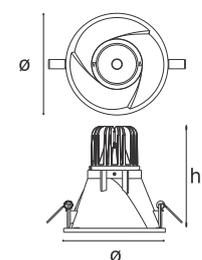


Available Colors

### Aria



High efficiency square COB recessed downlight encompassing of die-cast trim and deep recessed reflector to cut glare. Suitable for multiple applications.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LRS 9008	8	3000K/4000K/6000K	50°	79x94	100   100   87
LRS 9012	12	3000K/4000K/6000K	50°	79x94	100   100   87
LRS 9014	14	3000K/4000K/6000K	50°	79x94	100   100   87




Available Colors

### Viva



The oval slot trim COB downlight features a deep recessed lamp position for minimal glare. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 6608	8	3000K/4000K/6000K	40°	83	100   90
LHR 6612	12	3000K/4000K/6000K	40°	83	100   90
LHR 6614	14	3000K/4000K/6000K	40°	83	100   90




Available Colors

### Leo



Pinhole deep COB features a small diameter aperture & a deep recessed lamp position that provides optical glare control. This is a recessed downlight for application that requires maximum visual comfort & the highest standard of light quality.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 6408	8	3000K/4000K/6000K	40°	83	100   92.5
LHR 6412	12	3000K/4000K/6000K	40°	83	100   92.5
LHR 6414	14	3000K/4000K/6000K	40°	83	100   92.5

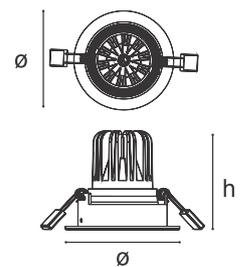


Available Colors

### Vela



The COB wallwasher with softly contoured aluminium reflector & energy efficient light source that combines to produce luminaire of exceptional performance.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 6508	8	3000K/4000K/6000K	50°	88	96   96
LHR 6512	12	3000K/4000K/6000K	50°	88	96   96
LHR 6514	14	3000K/4000K/6000K	50°	88	96   96

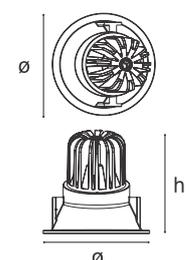


Available Colors

**Docco**



Compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources .

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LHR 6108	8	3000K/4000K/6000K	50°	106 x 106	110   110   73
LHR 6112	12	3000K/4000K/6000K	50°	106 x 106	110   110   73
LHR 6114	14	3000K/4000K/6000K	50°	106 x 106	110   110   73




Available Colors

**Double Docco**



Twin decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources .

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LHR 6214	16	3000K/4000K/6000K	50°	185 x 106	205   110   73
LHR 6224	24	3000K/4000K/6000K	50°	185 x 106	205   110   73
LHR 6228	28	3000K/4000K/6000K	50°	185 x 106	205   110   73

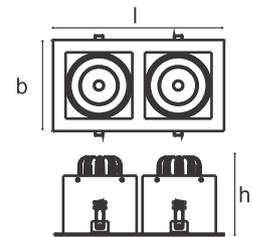


Available Colors

**Triple Docco**



Triple decorative COB downlight, compact styling, clean fascias and enclosed precision die-cast adjustable lamp housing with aluminium reflector & energy efficient light sources .

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LHR 6321	24	3000K/4000K/6000K	50°	280 x 106	298   110   73
LHR 6336	36	3000K/4000K/6000K	50°	280 x 106	298   110   73
LHR 6342	42	3000K/4000K/6000K	50°	280 x 106	298   110   73




Available Colors

**Omega-R**



Recessed COB downlights made of high efficiency die-cast aluminium with powder coated finish. Available with comprehensive choice of color temperatures and wattages.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LHR 6715	15	3000K/4000K/6000K	50°	133	145   88
LHR 6720	20	3000K/4000K/6000K	50°	133	145   88
LHR 6725	25	3000K/4000K/6000K	50°	133	145   88
LHR 6730	30	3000K/4000K/6000K	50°	133	145   88



Available Colors


## Sigma



The design features include fully enclosed precision die-cast aluminium construction, excellent pan and tilt adjustment. These adjustable recessed single chip COB downlights consist of high purity aluminium reflector.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LHR 6815	15	3000K/4000K/6000K	24°	102	114   98
LHR 6825	25	3000K/4000K/6000K	35°	129	137   121
LHR 6835	35	3000K/4000K/6000K	40°	154	163.5   148
LHR 6845	45	3000K/4000K/6000K	40°	174	190.5   167

Available Colors




### Omega Surface



Surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LVS 6512	12	3000K/4000K/6000K	NA	149   105
LVS 6515	15	3000K/4000K/6000K	NA	177.5   107
LVS 6518	18	3000K/4000K/6000K	NA	177.5   107




Available Colors ●

### Omega Suspended



Suspended LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LEDs for better light distribution.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LVS 6712	12	3000K/4000K/6000K	NA	149   105
LVS 6715	15	3000K/4000K/6000K	NA	177.5   105
LVS 6718	18	3000K/4000K/6000K	NA	177.5   105




Available Colors ●

### Zion D Surface



Slim surface LED downlight. Housing made of CRCA. Specular finished diffuser with high efficient LED for better light distribution.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LSM 5612	12	3000K/4000K/6000K	NA	94   154




Available Colors ●

### Zion D Suspended



Slim suspended COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LSM 5712	12	3000K/4000K/6000K	NA	94   154



Available Colors ●


### Rio



Slim COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS 3308	8	3000K/4000K/6000K	45°	NA	103   129
LRS 3312	12	3000K/4000K/6000K	45°	NA	103   129
LRS 3314	14	3000K/4000K/6000K	45°	NA	103   129

Available Colors




### Rio Mini



Slim COB downlight. Housing made of CRCA. Specular finished diffuser with high efficient COB for better light distribution.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS 3106	6	3000K/4000K/6000K	40°	NA	70   82

Available Colors




### Omega-R Surface



Surface COB downlight with high efficient COB & reflector for better light distribution. Housing made of CRCA.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LVS R 6520	20	3000K/4000K/6000K	50°	NA	148   135
LVS R 6525	25	3000K/4000K/6000K	50°	NA	148   135
LVS R 6530	30	3000K/4000K/6000K	50°	NA	148   135

Available Colors




### Omega-R Suspended




Suspended COB downlight with high efficient COB & reflector for better light distribution. Housing made of CRCA.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LVS R 6820	20	3000K/4000K/6000K	50°	NA	148   135
LVS R 6825	25	3000K/4000K/6000K	50°	NA	148   135
LVS R 6830	30	3000K/4000K/6000K	50°	NA	148   135

Available Colors




### Nora

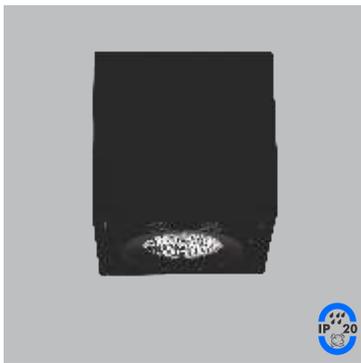

Surface mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LDN 7110	1x10	3000K/4000K/6000K	50°	NA	99   99   109

Available Colors




### Nora Suspended



Suspended mounted adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LDN 7310	1x10	3000K/4000K/6000K	50°	NA	99   99   109

Available Colors




### Nora-D



Surface mounted twin adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LDN 7210	2x10	3000K/4000K/6000K	50°	NA	186   97   109

Available Colors




### Nora-D Suspended



Suspended mounted twin adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LDN 7410	2x10	3000K/4000K/6000K	50°	NA	186   97   109

Available Colors




### Tubo Surface



Surface mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS 3308	8	3000K/4000K/6000K	50°	NA	63   185
LRS 3312	12	3000K/4000K/6000K	50°	NA	63   185
LRS 3320	20	3000K/4000K/6000K	50°	NA	88   200
LRS 3325	25	3000K/4000K/6000K	50°	NA	88   200




Available Colors

### Tubo Suspended



Suspended mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS-S 3308	8	3000K/4000K/6000K	50°	NA	63   185
LRS-S 3312	12	3000K/4000K/6000K	50°	NA	63   185
LRS-S 3320	20	3000K/4000K/6000K	50°	NA	88   200
LRS-S 3325	25	3000K/4000K/6000K	50°	NA	88   200




Available Colors

### Tubo-D Surface



Surface mounted cylindrical COB downlight with extruded aluminum housing & die casted heat sink. It has Diffused light with efficient COB & reflector for better light distribution suitable for retail, hospitality & residential application area.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS 3410	10	3000K/4000K/6000K	NA	63   185
LRS 3414	14	3000K/4000K/6000K	NA	63   185
LRS 3420	20	3000K/4000K/6000K	NA	88   200
LRS 3425	25	3000K/4000K/6000K	NA	88   200




Available Colors

### Tubo-D Suspended



Suspended mounted twin adjustable COB downlight with high efficient COB and reflector for better light distribution suitable for retail, hospitality and residential application area.

Product ID	Watt	CCT	Cutout (mm) $\varnothing$	Dimension (mm) $\varnothing$   h
LRS-S 3410	10	3000K/4000K/6000K	NA	63   185
LRS-S 3414	14	3000K/4000K/6000K	NA	63   185
LRS-S 3420	20	3000K/4000K/6000K	NA	88   200
LRS-S 3425	25	3000K/4000K/6000K	NA	88   200



Available Colors

### Lynx IP 20



Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an IP 20 product.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) b   h
LRS 2106	6/meter (60 LED)	3000K/4000K/6000K	NA	8
LRS 2206-R	6/meter (60 LED)	RED	NA	8
LRS 2206-G	6/meter (60 LED)	GREEN	NA	8
LRS 2206-B	6/meter (60 LED)	BLUE	NA	8
LRS 2114	14/meter (60 LED)	3000K/4000K/6000K	NA	8
LRS 2314-R	14/meter (60 LED)	RED	NA	8
LRS 2314-G	14/meter (60 LED)	GREEN	NA	8
LRS 2314-B	14/meter (60 LED)	BLUE	NA	8
LRS 2214	14/meter (120 LED)	3000K/4000K/6000K	NA	8
LRS 2414-R	14/meter (120 LED)	RED	NA	8
LRS 2414-G	14/meter (120 LED)	GREEN	NA	8
LRS 2414-B	14/meter (120 LED)	BLUE	NA	8


### Lynx IP 65



Flexible LED striplights made of bright LED chips, high quality thermal PCB board and an unmatched quality control process. It is an IP 65 product.


Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) b   h
LRS 2506	6/meter (60 LED)	3000K/4000K/6000K	NA	14   5
LRS 2514	14/meter (60 LED)	3000K/4000K/6000K	NA	14   5
LRS 2614	14/meter (120 LED)	3000K/4000K/6000K	NA	14   5

### Lita

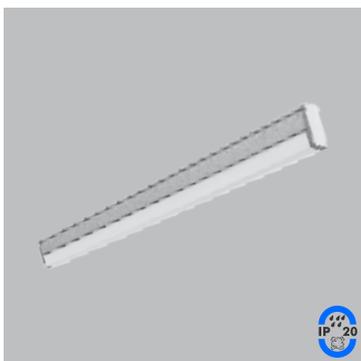

Aluminium extruded LED batten light in square shape with high efficient polycarbonate diffuser for uniform lighting.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
RBJ 100 0010	10	3000K/4000K/6000K	NA	601   24   38
RBJ 100 0020	20	3000K/4000K/6000K	NA	1186   24   38




Available Colors ●

### Stripo



The stripo led batten in square shape with aluminium housing & PC end cap. The luminaire and its components are designed for Indoor application. Inbuilt high efficient LEDs used with milky white diffuser for glare free high luminous output.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LST 1220	20	3000K/4000K/6000K	NA	607   35.4   44
LST 1240	40	3000K/4000K/6000K	NA	1196   35.4   44




Available Colors ●

### Aura



Organic design with die cast housing & heat sink for efficient heat dissipation. Ideal for retail & hospitality. Curved deep diamond facet reflector with glass to cut glare. Optical and thermal solution for high performance.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LAU 0020	20	3000K/4000K/6000K	55°	NA	191   90   171
LAU 0025	25	3000K/4000K/6000K	55°	NA	191   90   171
LAU 0030	30	3000K/4000K/6000K	55°	NA	191   90   171




Available Colors ●

### Aura Surface




Surface mounted die cast housing and heat sink for efficient heat dissipation in surface mounted option. Can be installed directly on ceiling. Curved deep diamond facet reflector with glass to cut glare.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LAU 1020	20	3000K/4000K/6000K	55°	NA	191   90   171
LAU 1025	25	3000K/4000K/6000K	55°	NA	191   90   171
LAU 1030	30	3000K/4000K/6000K	55°	NA	191   90   171




Available Colors ●

### Single Phase Track (1m)/(2m)

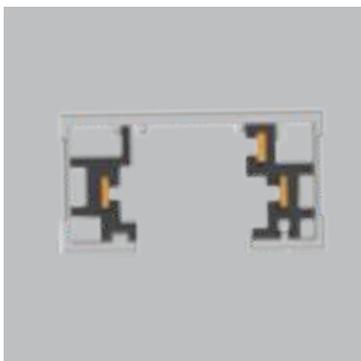

Extruded aluminium construction. Track offers separately controlled circuit with live adaptor & end cap.

Product ID	Watt	Color	Cutout (mm) l x b	Dimension (mm) l   b
TACT 1001	NA	WHITE	NA	17.8   34.3
TACT 1002	NA	BLACK	NA	17.8   34.3
TACT 2001	NA	WHITE	NA	17.8   34.3
TACT 2002	NA	BLACK	NA	17.8   34.3




### Mini Joiner Single Phase



Join two sections of straight track end to end.

Product ID	Watt	Color	Cutout (mm) l x b	Dimension (mm) l   b
TAMJ 001	NA	WHITE	NA	80   34
TAMJ 002	NA	BLACK	NA	80   34




### Suspension Kit

Includes track bracket, rods and suspension wires.



Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) l   b   h
TASK 3001	NA	WHITE	NA	62   35   59.5
TASK 3002	NA	BLACK	NA	62   35   59.5




### Delta



LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module. Fixture comes with two slot optics, combination of prismatic lens with louver. Offering low UGR for improved glare control and better uniformity.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LDG 6025	25	3000K/4000K/6000K	600   600   40



Available Colors

### Glace Pearl



Recessed LED luminaire combines an aesthetically pleasing design with class leading photometrics. This high efficient decorative module boast of extruded matt serrated glare control PMMA diffuser and is suitable for 600x600 Grid ceilings

Product ID	Watt	CCT	Dimension (mm) l   b   h
LER 3145	45	3000K/4000K/6000K	595   595   50




Available Colors

### Modena



LED Recessed grid - ceiling luminaire, suitable for 600 x 600 module and is enclosed with high efficient flat PMMA low glare diffuser.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LER 2628	28	3000K/4000K/6000K	595   595   76
LER 2636	36	3000K/4000K/6000K	595   595   76
LER 2642	42	3000K/4000K/6000K	595   595   76




Available Colors

### Modena 1x4



LED ceiling luminaire 1x4 suitable for recessed or suspended application with uniform illumination & higher efficiency.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LER 1240	40	3000K/4000K/6000K	1195   295   80




Available Colors

### Moon Light



Recessed LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LML 6045	45	3000K/4000K/6000K	595   595   60




Available Colors

### Moon Light Linear 1



Recessed LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LML 6050	50	3000K/4000K/6000K	1195   295   60




Available Colors

### Moon Light Linear 2



Recessed LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with PMMA low glare diffuser and high efficient LED.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LML 6080	80	3000K/4000K/6000K	1195   595   60




Available Colors

### Pento



LED Recessed luminaire, suitable for 300 x 300 module with high efficient flat PMMA low glare diffuser.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LER 2518	18	3000K/4000K/6000K	280x280	295   295   53




Available Colors

## Pento 2

LED Recessed luminaire, suitable for 600 x 300 module with high efficient flat PMMA low glare diffuser.



Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LER 2524	24	3000K/4000K/6000K	580x280	595   298   57



Available Colors




### Moon Light Suspended



A suspended LED 2x2 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LML 7045	45	3000K/4000K/6000K	NA	595   595   60

Available Colors




### Moon Light Linear 1 Suspended



A suspended LED 1x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LML 7050	50	3000K/4000K/6000K	NA	1195   295   60

Available Colors




### Moon Light Linear 2 Suspended



A suspended LED 2x4 luminaire made up of extruded aluminium to give a full glow effect with low glare PMMA diffuser and high efficient LEDs.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LML 7080	80	3000K/4000K/6000K	NA	1195   595   60

Available Colors




### Flare



This low profile surface mounted luminaire utilizes a one piece housing, and temper - resistant fasteners to maximize impact resistance. This LED luminaire encompasses high efficiency PMMA low glare diffuser.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LES 4245	45	4000K/6000K	580x580	580   580   62

Available Colors




### Mento



This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides an unobstructed, visually comfortable light. This LED luminaire produces excellent, uniform, low glare light mainly because of the use of high efficiency square shaped PMMA low glare diffuser.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LES 4218	18	4000K/6000K	240x240	262   262   54




Available Colors

### Mento 2



This surface mounted decorative luminaire is a fully assembled, one piece surface lighting system that provides an unobstructed, visually comfortable light. This LED luminaire produces excellent, uniform, low glare light mainly because of the use of high efficiency PMMA low glare diffuser mounted on serrated aluminium frame.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LES 4224	24	4000K/6000K	540x300	540   300   60




Available Colors

### Sonic



Sonic a perfect suspended design with step in optics offering a combination of functionality and design. A linear lens combination gives a unique look to this product. A aesthetically pleasant product suitable in various applications like offices, restaurants, Showrooms etc.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LPS 5025	25	3000K/4000K/6000K	NA	1177   57.7   85.6
LPS 5040	40	3000K/4000K/6000K	NA	1177   57.7   85.6




Available Colors ●

### Verge 5



The suspended aluminum extrusion with continuous reflectors optics that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers gives flexible light option to the product.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LVP 5130	30	3000K/4000K/6000K	NA	1186   57.7   85.6




Available Colors ●

### Verge 3




The suspended aluminum extrusion with three reflectors module optics that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers gives flexible light option to the product.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LVP 5230	30	3000K/4000K/6000K	NA	1215   57.7   85.6




Available Colors ●

### Verge

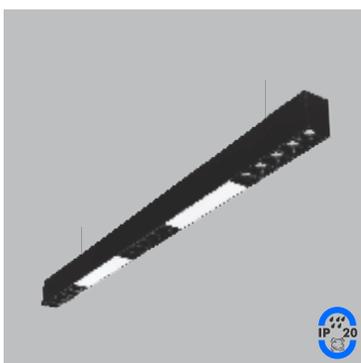

The suspended aluminum extrusion having dual optics with three reflectors module & diffuser that offers improved efficiency with focus on reduced UGR. Various customisation available with prismatic lens in cell louvers and diffused slot gives flexible light option to the product.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LVP 5340	40	3000K/4000K/6000K	NA	1215   57.7   85.6




Available Colors ●

### Olive




A perfect combination of functionality and design, Olive is designed in an all rounder shape giving a clean aesthetic to a space. A newly designed suspended lighting is now on board, revealing a clean accessible revolutionary design perfectly blending in any space. The housing functions to support other components of the luminaire and provides a mounting mechanism for the attachment of the luminaire. The evolution in commercial lighting has been characterized by progress in all directions ; along with improvements in luminous performance and functional efficiency.

Product ID	Watt	CCT	Cutout (mm)   x b	Dimension (mm)   l   b   h
LSO 8520	20	3000K/4000K/6000K	NA	1200   87   79.3
LSO 8530	30	3000K/4000K/6000K	NA	1200   87   79.3




Available Colors

### Tulip

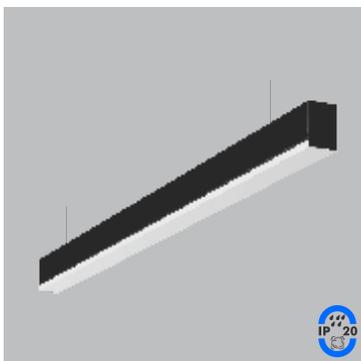

Tulip a suspended extruded aluminium housing design offers improved uniformity with soft C profile LG7 diffuser lit on all three sides offering a soft homogeneous, volumetric light distribution snap fit diffuser for ease in maintenance.

Product ID	Watt	CCT	Cutout (mm)   x b	Dimension (mm)   l   b   h
LSO 5020	20	3000K/4000K/6000K	NA	1200   50.5   75
LSO 5030	30	3000K/4000K/6000K	NA	1200   50.5   75




Available Colors

### Strapline 50 Up & Down




The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with Direct-Indirect light distribution, high wired electronic ballast to be used in suspended applications.

Product ID	Watt	CCT	Cutout (mm)   x b	Dimension (mm)   l   b   h
LSL-S 5130	30	3000K/4000K/6000K	NA	1200   52.8   101
LSL-S 5140	40	3000K/4000K/6000K	NA	1200   52.8   101




Available Colors

### Strapline 72 Suspended

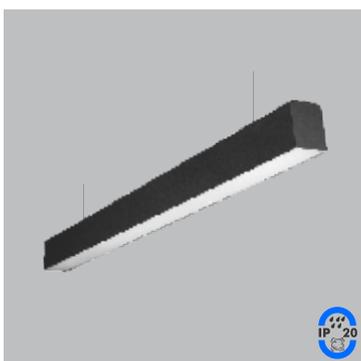

The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

Product ID	Watt	CCT	Cutout (mm)   x b	Dimension (mm)   l   b   h
LSL-S 7220	20	3000K/4000K/6000K	NA	1000/1200   73   78
LSL-S 7230	30	3000K/4000K/6000K	NA	1000/1200   73   78
LSL-S 7240	40	3000K/4000K/6000K	NA	2000/2400   73   78
LSL-S 7260	60	3000K/4000K/6000K	NA	2000/2400   73   78




Available Colors

### Strapline 50 Suspended



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL-S 5020	20	3000K/4000K/6000K	NA	1000/1200   53   80
LSL-S 5030	30	3000K/4000K/6000K	NA	1000/1200   53   80
LSL-S 5040	40	3000K/4000K/6000K	NA	2000/2400   53   80
LSL-S 5060	60	3000K/4000K/6000K	NA	2000/2400   53   80




Available Colors

### Strapline 35 Suspended



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast to be used in suspended/surface applications.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL-S 3520	20	3000K/4000K/6000K	NA	1000/1200   36.5   53
LSL-S 3540	40	3000K/4000K/6000K	NA	2000/2400   36.5   53




Available Colors

### Strapline 72 Recessed



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL-R 7220	20	3000K/4000K/6000K	984/1184   75	1000/1200   92   92
LSL-R 7230	30	3000K/4000K/6000K	984/1184   75	1000/1200   92   92
LSL-R 7240	40	3000K/4000K/6000K	1984/2384   75	2000/2400   92   92
LSL-R 7260	60	3000K/4000K/6000K	1984/2384   75	2000/2400   92   92




Available Colors

### Strapline 50 Recessed



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL-R 5020	20	3000K/4000K/6000K	992/1192   55	1000/1200   63   80
LSL-R 5030	30	3000K/4000K/6000K	992/1192   55	1000/1200   63   80
LSL-R 5040	40	3000K/4000K/6000K	1992/2392   55	2000/2400   63   80
LSL-R 5060	60	3000K/4000K/6000K	1984/2384   55	2000/2400   63   80




Available Colors

### Strapline 35 Recessed



The extruded aluminium housing offers a precise in-line appearance. This LED fixture comes with excellent light distribution, high wired electronic ballast and mounting clamps to be used in recessed application.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL-R 3520	20	3000K/4000K/6000K	992/1192   38	1000/1200   46.5   57
LSL-R 3540	40	3000K/4000K/6000K	992/1192   38	2000/2400   46.5   57




Available Colors

### Strapline T



Luminaires compatible with armstrong TECHZONE ceiling. Recessed single length individual luminaire, aluminium extruded natural anodised housing with matt finish extruded PMMA opal diffuser with uniform light distribution.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSL 8030	30	3000K/4000K/6000K	NA	1195   145   60




Available Colors

### Slot



Surface/Recessed mounting single length individual luminary, aluminum extruded natural anodized housing with crystal clear . High lumen output product gives desired lux at low wattage.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSA 10090	90	3000K/4000K/6000K	1169x102	1200   133   91
LSA 10100	100	3000K/4000K/6000K	1169x102	1200   133   91




Available Colors

### Slot-D



Surface/Recessed mounting single length individual luminary, aluminum extruded natural anodized housing with crystal clear . High lumen output product gives desired lux at low wattage.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSA 11090	90	3000K/4000K/6000K	1169x102	1200   133   91
LSA 11100	100	3000K/4000K/6000K	1169x102	1200   133   91




Available Colors

### Slot-N



Surface/Recessed mounting single length individual luminary, aluminum extruded natural anodized housing with crystal clear . High lumen output product gives desired lux at low wattage.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSA 09040	40	3000K/4000K/6000K	1192x95	1200   103.5   90
LSA 09050	50	3000K/4000K/6000K	1192x95	1200   103.5   90
LSA 09060	60	3000K/4000K/6000K	1192x95	1200   103.5   90
LSA 09075	75	3000K/4000K/6000K	1192x95	1200   103.5   90




Available Colors

### Slit



Surface/Suspended mounting single length individual luminary, aluminum extruded natural anodized housing with PMMA diffuser. A high lumen output product gives desired lux at low wattage.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSA 15070	70	3000K/4000K/6000K	NA	1200   150   110




Available Colors

### Pill-2.0



Round extruded aluminium housing with opal PMMA diffuser. Smart circular disk fixture, Pill-2.0 suspended gives functional decorative look. Also opal PMMA diffuser is so fixed in inner periphery of extrusion to cut down the glare & provide uniform light output.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
APP-S 3130	30	3000K/4000K/6000K	NA	400   65
APP-S 4145	45	3000K/4000K/6000K	NA	500   65
APP-S 5156	56	3000K/4000K/6000K	NA	600   65
APP-S 6180	80	3000K/4000K/6000K	NA	900   65
APP-S 12100	100	3000K/4000K/6000K	NA	1170   65




Available Colors

### Pill Suspended



Round extruded aluminium housing with opal PMMA diffuser. High efficient LEDs for uniform light distribution .

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
ALP-S 4130	30	3000K/4000K/6000K	NA	400   60
ALP-S 5145	45	3000K/4000K/6000K	NA	500   60
ALP-S 6156	56	3000K/4000K/6000K	NA	600   60
ALP-S 9180	80	3000K/4000K/6000K	NA	900   60
ALP-S 12100	100	3000K/4000K/6000K	NA	1170   60




Available Colors

### Pill Recessed



Round luminaire aluminium, rolled profile, seamlessly welded housing with integrated tool-less suspension height adjustment. Highly reflective coating for improved efficiency with high transmission factor PMMA diffuser. Rolled aluminium frame accessory along with fixture for ease in installation.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
ALP-R 4230	30W	3000K/4000K/6000K	NA	395   95
ALP-R 5245	45W	3000K/4000K/6000K	NA	527   93
ALP-R 6256	56W	3000K/4000K/6000K	NA	635   93




Available Colors

### Pill Surface



Round luminaire aluminium, rolled profile, seamlessly welded housing with integrated tool-less suspension height adjustment. Highly reflective coating for improved efficiency with high transmission factor PMMA diffuser. Rolled aluminium frame accessory along with fixture for ease in installation.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
ASP 4330	30	3000K/4000K/6000K	NA	400   110
ASP 5345	45	3000K/4000K/6000K	NA	500   110
ASP 6350	50	3000K/4000K/6000K	NA	600   110
ASP 9380	80	3000K/4000K/6000K	NA	900   110




Available Colors

### Ripple-2.0




Suspended mounted round extruded aluminium housing with opal PMMA diffuser. Smart Circular ring fixture gives decorative look to the product. Also Opal diffuser is so fixed at inner periphery of extrusion to cut down the glare & provide uniform light output.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
ARP 6030	30	3000K/4000K/6000K	NA	600   65
ARP 9055	55	3000K/4000K/6000K	NA	900   65
ARP 12100	100	3000K/4000K/6000K	NA	1170   65




Available Colors

### Ripple

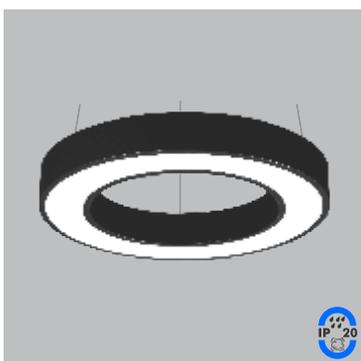

Round extruded aluminium housing with opal PMMA diffuser. Smart circular ring gives functional decorative look. Also opal PMMA diffuser is so fixed to provide uniform light output.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
ARL 6030	30	3000K/4000K/6000K	NA	600   60
ARL 9055	55	3000K/4000K/6000K	NA	900   60
ARL 12080	80	3000K/4000K/6000K	NA	1170   60



Available Colors


### Crescent



Extruded Aluminum housing in Circular Arc form with PMMA Diffuser. High efficient LEDs with uniform light distribution.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
ACL 6030	30	3000K/4000K/6000K	NA	801.3   301.6   60

Available Colors




### Trio




Triangular extruded aluminium housing with soft corner and opal PMMA diffuser. High efficient LEDs for uniform light.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
ATL-S 3030	30W	3000K/4000K/6000K	NA	511   465   88

Available Colors




### Hexo

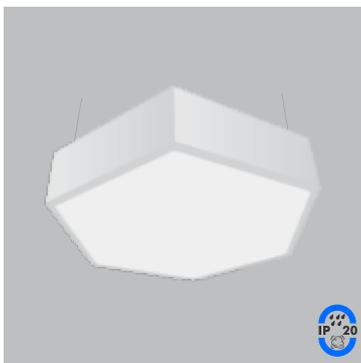

The extruded aluminium housing in hexagon shape with opal PMMA diffuser. High efficient LEDs for uniform light distribution.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
AHL 6040	40	3000K/4000K/6000K	NA	672   582   60

Available Colors




### Recto



Rectangular shape extruded aluminium housing with opal PMMA diffuser gives functional look. Also high efficient LEDs & diffuser combination gives smooth & uniform light.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
ARL 6330	30	3000K/4000K/6000K	Na	600   300   60

Available Colors




### Frame



Square extruded aluminium housing with opal PMMA diffuser. Geometrical shape blends perfectly with ceiling design & gives unique product look.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
AFL 5030	30	3000K/4000K/6000K	NA	500   500   60

Available Colors




### Petal



Extruded aluminium housing designed in leaf shape for unique & decorative look. Opal PMMA diffuser is used to give smooth & glare free light output.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
APL 6330	30W	3000K/4000K/6000K	NA	609   307   60


Available Colors



## Our Projects



## Our Projects

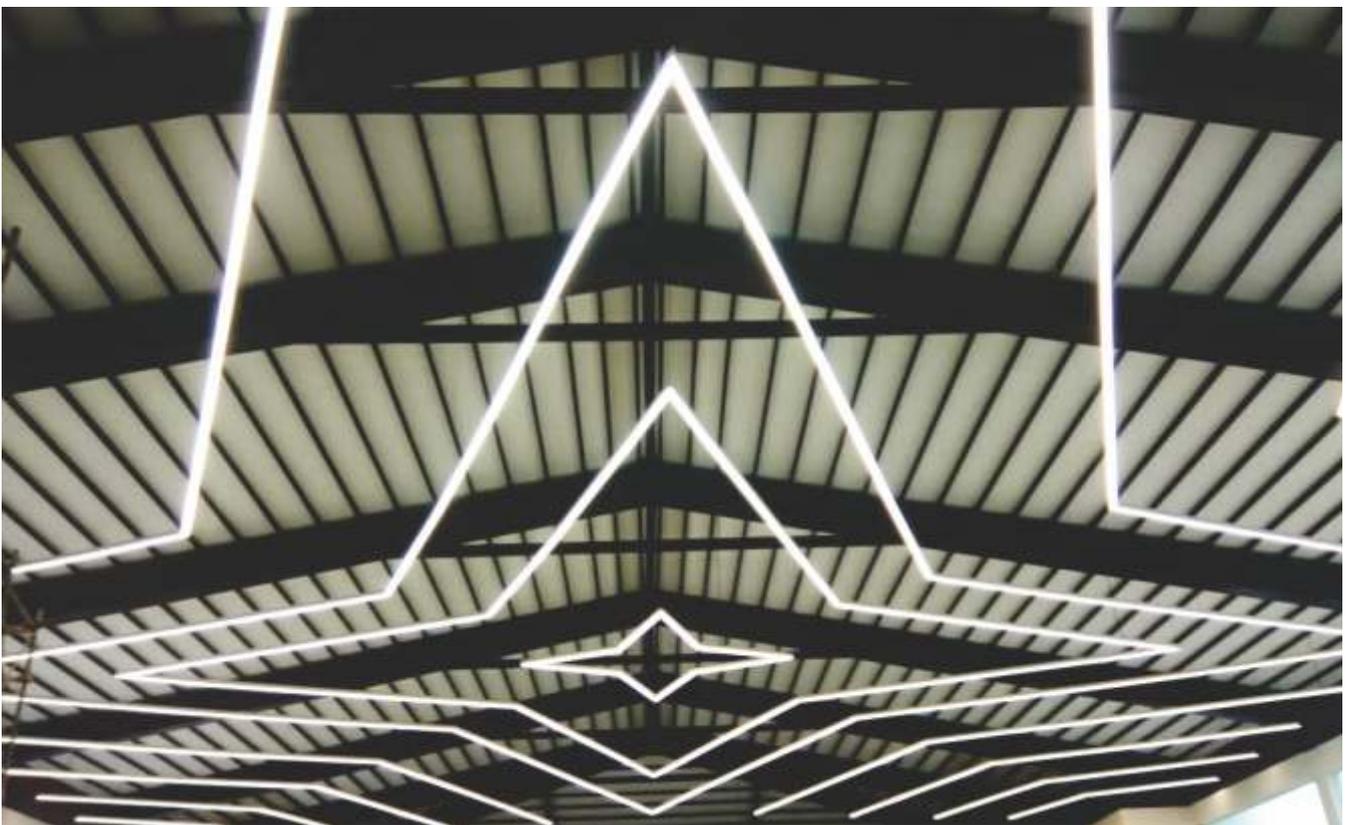


### D Lite



The decorative luminaire suitable for LED bulbs available in different color options. Designer product suitable for various interior intent size option offers flexibility with respect to product application. Neat design with minimalistic approach.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LDTE 300	9/12/15	3000K/4000K/6000K	NA	305   185
LDTE 380	9/12/15	3000K/4000K/6000K	NA	373   205
LDTE 425	9/12/15	3000K/4000K/6000K	NA	425   210
LDTE 600	9/12/15	3000K/4000K/6000K	NA	600   320




Available Colors    
Other colors as per request

### Zeta



The decorative luminaire suitable for LED bulbs available in different color options. Inspired by water droplet, fixture has fluid design intent. Softness in design makes it suitable for almost any interior fit out.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LZTE 3030	9/12/15	3000K/4000K/6000K	NA	257   210
LZTE 3020	9/12/15	3000K/4000K/6000K	NA	368   280
LZTE 3010	9/12/15	3000K/4000K/6000K	NA	420   280




Available Colors    
Other colors as per request

### Mole



The decorative luminaire suitable for LED bulbs available in different color options. Compact and cute design which can be used in a cluster. Simple and yet elegant, Mole can be used on various breakout areas of both residential and commercial fit outs.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LMOL 205	9/12/15	3000K/4000K/6000K	Na	205   175




Available Colors    
Other colors as per request

### Tope



The decorative luminaire suitable for LED bulbs available in different color options. Tope with industrial touch and robust feel is inspired from grunge design.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LTOP 405	9/12/15	3000K/4000K/6000K	NA	405   265



Available Colors    
Other colors as per request


### Blaze



The BLAZE modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm)   b   h
LBL-N 040	40	5700K	60°/90°	NA	217   228   100
LBL-N 050	50	5700K	60°/90°	NA	217   228   100

Available Colors ●




### Blaze



The BLAZE modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm)   b   h
LBL-N 080	80	5700K	60°/90°	NA	325   228   100
LBL-N 100	100	5700K	60°/90°	NA	325   228   100

Available Colors ●




### Blaze



The BLAZE modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm)   b   h
LBL-N 120	120	5700K	60°/90°	NA	422   228   100
LBL-N 150	150	5700K	60°/90°	NA	422   228   100

Available Colors ●




### Blaze



The BLAZE modular Highbay is a hassle free replacement of general highbay in industries. Blaze comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze comes with decorative design and multiple color option. Aluminum die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section. Precision lens optic system optimizes illumination for open floor, racked or aisle way applications.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm)   b   h
LBL-N 200	200	5700K	60°/90°	NA	522   228   100

Available Colors ●




### Delphi



Elegant round High bay luminaire design along with Lens & toughened glass which is designed to replace traditional High bays & its center small light gives quite decorative look. The system delivers simple, point to point replacement with easy installation methods of hook, pendants and brackets. Unique matt finish powder coating gives alluring look to the fixture. A Multi electronic driver in the housing provides extra performance and unique feature to the product.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LDH 080	80	3000K/4000K/6000K	45°/60°/90°	NA	275   199
LDH 100	100	3000K/4000K/6000K	45°/60°/90°	NA	275   199




Available Colors ●

### Roto



Elegant round Highbay luminaire design along with Lenses & glasses is designed to replace traditional Highbays. The system delivers simple, point to point replacement with easy installation methods of hook, pendants and brackets. Unique matt finish powder coating gives alluring look to the fixture.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) ø   h
LRO 080	80	3000K/5700K	60°/90°	NA	276   163
LRO 0100	100	3000K/5700K	60°/90°	NA	276   163
LRO 120	120	3000K/5700K	60°/90°	NA	320   173
LRO 150	150	3000K/5700K	60°/90°	NA	320   173
LRO 200	200	3000K/5700K	60°/90°	NA	365   183




Available Colors ●

### Axel



Axel is an Innovative LED base well glass luminaire for direct replacement of 100W Conventional Fixture. Axel has the potential to save up to 60% of energy without compromising lighting parameters in the existing installation. Axel is widely used in various applications in diversified sector. It is developed by using advance technology and requisition tool in compliance with quality standards. Available in both opal & clear vandal resistant polycarbonate diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LAX 040 (Opal)	40	6500K	NA	120   180
LAX 040 (Clear)	40	6500K	NA	120   180




Available Colors ●

### Harbour



HARBOUR IP 65 is a linear indoor product which is light in weight made of Polycarbonate body with frostate (milky) diffuser to give smooth & glare free light.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LHB 025	25	3000K/4000K/6000K	NA	1260   78   84
LHB 040	40	3000K/4000K/6000K	NA	1260   123   86




Available Colors ●

### Strix



The Strix (Industrial Batten) is the highly efficient and reliable IP65 led lighting solution. The luminaire and its components are designed for Indoor & Outdoor application. Inbuilt high efficient LEDs used with PC housing & milky white diffuser for glare free luminous output.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LSB 1220	20	3000K/4000K/6000K	NA	633   54   53
LSB 1220	40	3000K/4000K/6000K	NA	1217   54   53




Available Colors ●

### Clean Room



An IP 54 LED recessed grid ceiling luminaire Suitable for 600x600 module enclosed with high efficient diffused to give the low glare and maximum efficiency. Bottom opening for ease in maintenance.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LCR 2345	45	3000K/4000K/6000K	NA	597   597   86




Available Colors ○

### Dura



The Dura series brings the advantages of energy efficient and controllable lighting for industrial application with LED lamp source for long life.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LIF 3118	1x18	3000K/4000K/6000K	NA	1230   56   73
LIF 3236	2x18	3000K/4000K/6000K	NA	1230   110   78




Available Colors ○

### Saber



The Saber T8 retrofit brings the advantages of energy efficient and controllable lighting for industrial application with LED lamp source for long life. Easy installation with one side as well as two side connection provide a convenient replacement to conventional retrofit.

Product ID	Watt	CCT	Cutout (mm) ø x l	Dimension (mm) ø   l
LRT-T8-018	18	3000K/4000K/6000K	NA	28   1205
LRT-T8-020	20	3000K/4000K/6000K	NA	28   1205




Available Colors ○

### Pictor



An ultra compact, IP 66, LED light luminaire. Its corrosion proof, die cast aluminium composite construction makes it ideal for the harshest corrosive environment. Spike available to ease the installation.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) ø   l   h
LSO 3007	7	3000K	NA	75   138   245
LSO 3010	10	3000K	NA	75   138   245




Available Colors ●

### Oreon



Wall mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   l   h
LCO 4407	7	3000K/4000K/6500K	NA	80   115   192
LCO 4412	12	3000K/4000K/6500K	NA	80   115   192
LCO 4415	15	3000K/4000K/6500K	NA	80   115   192




Available Colors ●

### Oreon Up & Down



Wall mounted IP 65 up-down luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   l   h
LCO 4514	2x7	3000K/4000K/6500K	NA	80   115   200
LCO 4524	2x12	3000K/4000K/6500K	NA	80   115   240
LCO 4530	2x15	3000K/4000K/6500K	NA	80   115   240




Available Colors ●

### Oreon Surface



Ceiling mounted IP 65 luminaire made of high grade aluminium extrusion & die cast aluminium heatsink for effective heat dissipation with high efficient COB for better output. The luminaire is available in different beam angles with toughened glass.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LCO 4307	7	3000K/4000K/6500K	NA	80   186
LCO 4312	12	3000K/4000K/6500K	NA	80   186
LCO 4315	15	3000K/4000K/6500K	NA	80   186




Available Colors ●

Sia



IP 65 SIA (bulk head) light is integrated with high efficient LEDs with milky diffuser covering. The fixture has integrated driver and is easy on maintenance.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LBH 0012	12	6000K	NA	189   109   67




Available Colors ●

Dew



Round IP65 Dew (Bulk head) is integrated with high efficient LEDs with PC housing & milky white diffuser for better aesthetics & glare free output.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LDO 012	12	3000K/4000K/6000K	NA	192   85




Available Colors ○

Vola



IP 65 Die Cast Aluminum Housing. Horizontal vertical scoop Step Light designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters with separate GI box enclosure & integrated driver.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LOD 2009	9	3000K	NA	200   115   67




Available Colors ●

Brick



IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LOD 3004	4	3000K/4000K/6000K	87.1	99   99   61
LOD 3006	6	3000K/4000K/6000K	87.1	99   99   61




Available Colors ●

### Locus 2



IP 65 designer step light with integrated high efficient LED designed for safety & style for stairways, patios, decks, balcony areas & walkways.

Product ID	Watt	CCT	Dimension (mm) l   b   h
LOD 3109	9	3000K/4000K/6000K	200   90   48




Available Colors ●

### Mushroom



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LBM 7008	8	3000K/6000K	NA	150   745




Available Colors ●

### Fern



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LBF 7012	12	3000K/6000K	NA	122   750




Available Colors ●

### Torch



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LBT 7012	12	3000K/6000K	NA	175   757



Available Colors ●


### Polo



IP 65 LED bollard is suitable for landscape stabilized lighting applications. Luminaire is made of high grade corrosion resistant powder coated aluminium body with UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LBP 6515	15	3000K/4000K/6000K	104	218   750

Available Colors ●




### Ring



Post top fixture for pole mounted application. Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof clear diffuser. IP65 protection suitable for outdoor application.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LPT 4530	30	3000K/4000K/6000K	NA	650   425
LPT 6560	60	3000K/4000K/6000K	NA	650   425

Available Colors ●




### Marshall



Post top fixture for pole mounted application. Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof clear diffuser. IP65 protection suitable for outdoor application.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LPM 4540	45	3000K/4000K/6000K	NA	450   520

Available Colors ●




### Ogee



Post top fixture for pole mounted application. Aluminium housing with corrosion resistant powder coat and UV stabilised vandal proof clear diffuser. IP65 protection suitable for outdoor application.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LPO 3530	30	3000K/4000K/6000K	NA	370   450

Available Colors ●




### Bolt



IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in spin aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) ø	Dimension (mm) ø   h
LPB 4045	45	3000K/4000K/6000K	NA	450   680




Available Colors ●

### Titan




IP 65 Lamp Post is suitable for outdoor lighting applications. Luminaire is made in die-cast aluminium housing with corrosion resistant powder coated and UV stabilized vandal proof PC diffuser.

Product ID	Watt	CCT	Cutout (mm) l x b	Dimension (mm) l   b   h
LPT 3045	45	3000K/4000K/6000K	NA	315   315   690




Available Colors ●

### Blaze Floodlight

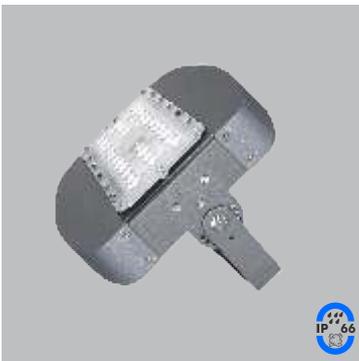

The BLAZE modular Floodlight is a hassle free replacement of general Conventional Floodlight in industries. Blaze Floodlight comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze Floodlight comes with decorative design and aluminium die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LFL 040	40	5700K	60°/90°	NA	217   228   100
LFL 050	50	5700K	60°/90°	NA	217   228   100




Available Colors ●

### Blaze Floodlight



The BLAZE modular Floodlight is a hassle free replacement of general Conventional Floodlight in industries. Blaze Floodlight comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze Floodlight comes with decorative design and aluminium die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LFL 080	80	5700K	60°/90°	NA	325   228   100
LFL 100	100	5700K	60°/90°	NA	325   228   100



Available Colors ●


### Blaze Floodlight



The BLAZE modular Floodlight is a hassle free replacement of general Conventional Floodlight in industries. Blaze Floodlight comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze Floodlight comes with decorative design and aluminium die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LFL 150	150	5700K	60°/90°	NA	422   228   100

Available Colors ●




### Blaze Floodlight



The BLAZE modular Floodlight is a hassle free replacement of general Conventional Floodlight in industries. Blaze Floodlight comes with light efficacy of 150 lm/w & customized LED Light module and various precision lens optics packages. Blaze Floodlight comes with decorative design and aluminium die cast module with unique designed heat sink fins provide thermal management to natural convection. Decorative Polycarbonate End caps give an aesthetic appeal to the product. Various hanging degrees provide in the mounting clamp for mounting light in different angles. Each module comes with its separate driver section.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) ø	Dimension (mm) l   b   h
LFL 200	200	5700K	60°/90°	NA	522   228   100

Available Colors ●




### Astra-LW



ASTRA-LW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LAS 0030	30	3000K/5700K	60°/90°	NA	182   143   108
LAS 0050	50	3000K/5700K	60°/90°	NA	182   143   108

Available Colors ●




### Astra-MW



ASTRA-MW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LAS 0100	100	3000K/5700K	60°/90°	NA	280   228   160
LAS 0150	150	3000K/5700K	60°/90°	NA	280   228   160

Available Colors ●




### Astra-HW



ASTRA-HW Floodlight is a universal, compact range of floodlights with two type of beam angle lens. The range is suitable for various applications around buildings, ideal for facade lighting as well as lighting gardens, paths near to buildings, garages, entrance ways, security lighting and drives. This IP 66 product comes with fixture efficacy of 125 lm/w.

Product ID	Watt	CCT	Beam Angles	Cutout (mm) l x b	Dimension (mm) l   b   h
LAS 0200	200	3000K/5700K	60°/90°	NA 388   289	140
LAS 0250	250	3000K/5700K	60°/90°	NA 430   330	180
LAS 0300	300	3000K/5700K	60°/90°	NA 430   330	180
LAS 0350	350	3000K/5700K	60°/90°	NA 520   330	190
LAS 0400	400	3000K/5700K	60°/90°	NA 520   330	190




Available Colors ●

### Bento



IP 66 LED street light with high pressure aluminium die-cast body and toughened glass. Powered with high efficacy LED chips to give the best output.

Product ID	Watt	CCT	Beam Angles	Pole Dia (mm) ø	Dimension (mm) l   b   h
LRS 99020	20	6000K	100°	40	330   96   56
LRS 99030	30	6000K	105°	40	330   96   56
LRS 99040	40	6000K	110°	40	265   124   56




Available Colors ●

### Bento



IP 66 LED street light with high pressure aluminium die-cast body and toughened glass. Powered with high efficacy LED chips to give the best output. Back driver opening suitable for easy replacement.

Product ID	Watt	CCT	Beam Angles	Pole Dia (mm) ø	Dimension (mm) l   b   h
LRS 99050	50	6000K	110°	40	335   140   95
LRS 99070	70	6000K	110°	50	400   195   100
LRS 99090	90	6000K	110°	50	400   195   100




Available Colors ●

### Cleo



IP 66 LED street light with high pressure aluminium die cast body and lens toughened glass. Powered with high watt LED chips to give the best output. Wider spread angle of lens with toughened glass provide extra coverage of light on road.

Product ID	Watt	CCT	Beam Angles	Pole Dia (mm) ø	Dimension (mm) l   b   h
LCL 0018	18	5700K	135° x 75°	40	330   96   56
LCL 0024	24	5700K	145° x 70°	40	330   96   56
LCL 0036	36	5700K	145° x 75°	40	265   124   56
LCL 0045	45	5700K	145° x 65°	40	335   140   95




Available Colors ●

### Cleo



Unique designed Street light with High Power LED and Back driver opening comes with all the options suitable for lighting outdoor application. Wider spread angle of lens with toughened glass provide extra coverage of light on roads. Aluminium Die cast Housing with unique heat sink fins structure provides thermal management to natural convection. This IP 66 product comes with fixture efficacy of 125 lm/w and a warranty of 3 years.

Product ID	Watt	CCT	Beam Angles	Pole Dia (mm) ø	Dimension (mm) l   b   h
LCL 0072	72	5700K	145° x 60°	50	400   190   100
LCL 0090	90	5700K	145° x 80°	50	400   190   100
LCL 00110	110	5700K	145° x 70°	50	400   190   100
LCL 00140	140	5700K	145° x 65°	50	440   230   108
LCL 00190	190	5700K	145° x 70°	60	502   257   110




Available Colors ●

### Ledra




IP 66 LED street light with high pressure aluminium die cast body and toughened glass. Powered with high efficacy LED chips and lenses to give the best output.

Product ID	Watt	CCT	Beam Angles	Pole Dia (mm) ø	Dimension (mm) l   b   h
LSL 10075	75	6000K	140° x 70°	54	725   305   146
LSL 10120	120	6000K	140° x 70°	54	895   370   189



Available Colors ●

Our Projects

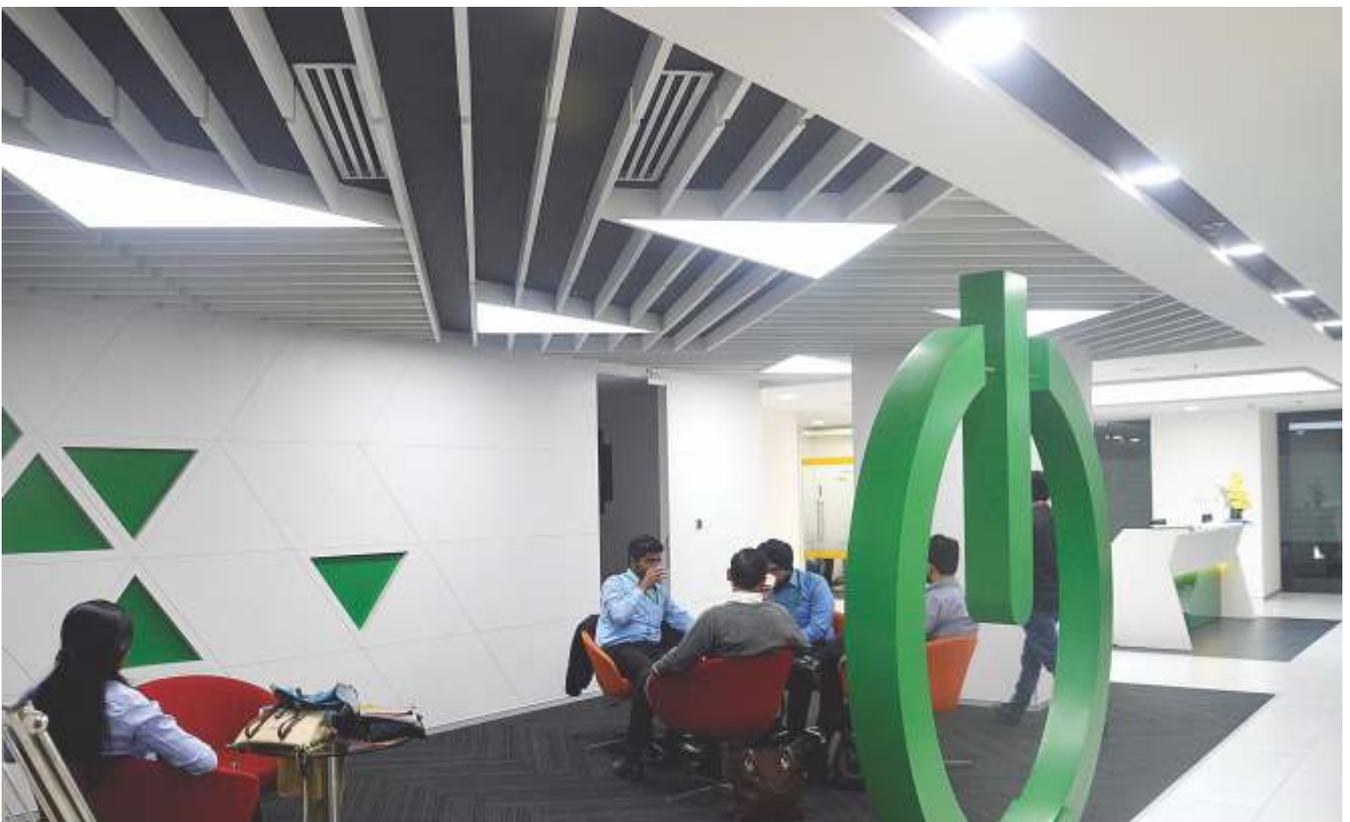

# Legero



**You possess the light.**

# Legero

Spread The Light,  
Be The Light



## Legero Lighting

### Pune Office

Office No. 105, Garnets Bay,  
Next to Four Points Sheraton,  
Nagar Road, Pune - 411014  
+91 9921771100

### Corporate Office

E-139, Sector 63, Noida - 201301, India  
+91 120 4272775  
info@legerolighting.com

legerolighting.com