

liper[®]



SOLE DISTRIBUTOR IN NEPAL





Model No: (LPDL-3A-Y) 3w Down Light ,RD

Wattage : 3w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen:80 LM/W
Life time: >30000 hours
Color temperature:2700k , 6500k
Product size: 98*28mm
Cut size:70-90mm



Model No:(LPDL-6A-Y) 6w Down light ,RD

Wattage : 6w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80 LM/W
Life time: >30000 hours
Color temperature: 2700k , 6500k
Product size: 120*28mm
Cut size:90-110mm



Model No:(LPDL-8A-Y) 8w Down light, RD

Wattage : 8w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80 LM/W
Life time: >30000 hours
Color temperature: 2700k , 6500k
Product size: 146*28mm
Cut size:120-136mm



Model No :(LPDL-12A-Y) 12w Down Light, RD

Wattage : 12w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 920-1060LM
Life time: >30000 hours
Color temperature: 2700k , 6500k
Product size: 146*28mm
Cut size:120-136mm



Model No :(LPDL-18A-Y) 18w Down Light ,RD

Wattage : 18w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80 LM/W
Life time: >30000 hours
Color temperature:6500k
Product size: 194*28mm
Cut size:155-185mm



Model No :(LPDL-26A-Y) 26w Down Light, RD

Wattage : 26w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80 LM/W
Life time: >30000 hours
Color temperature: 6500k
Product size: 225*28mm
Cut size:195-215mm



Model No: (LPDL-6A-Y) 6w Down light ,SQ

Wattage : 6w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80lm/W
Life time: >30000 hours
Color temperature: 2700k , 6500k
Product size: 120*28mm
Cut size:90-110mm



Model No: (LPDL-12A-Y)12w Down light ,SQ

Wattage : 12w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80lm/W
Life time: >30000 hours
Color temperature: 2700k , 6500k
Product size: 146*28mm
Cut size:120-136mm



Model No: (LPDL-18A-Y)18w Down light ,SQ

Wattage : 18w
AC 220-240V~ 50/60Hz
Led chip 5730 Ra>80
Lumen: 80lm/W
Life time: >30000 hours
Color temperature:6500k
Product size: 194*28mm
Cut size:155-185mm



Model No: (LPDL-26A-Y)26w Down light ,SQ
 Wattage : 26w
 AC 220-240V~ 50/60Hz
 Led chip 5730 Ra>80
 Lumen: 80lm/W
 Life time: >30000 hours
 Color temperature: 6500k
 Product size: 225*28mm
 Cut size:195-215mm



Model No: (LPDL 6A-Y) Surface Panel, RD
 Watts: 6W
 Input: AC220-240V
 Led chip 5730
 Lumen: 500-850LM
 RA=80
 Life time: >30000 hours
 Color Temperature: 6500k



Model No: (LPDL 12A-Y) Surface Panel, RD
 Wattage : 12w
 AC 220-240V
 Led chip 5730
 Ra>80
 Lumen: 920-1060LM
 Life time: >30000 hours
 Color temperature: 2700k, 6500k
 Product size: 153*58mm



Model No: (LPDL 18A-Y) Surface Panel, RD
 Wattage : 18w
 AC 220-240V
 Led chip 5730 Ra>80
 Lumen:1930-2200LM
 Life time: >30000 hours
 Color temperature: 6500k
 Product size: 200*60mm




Model No: (LPDL 24A-Y)24w Surface LED, SQ
 Wattage : 24w
 AC 220-240V
 Led chip 5730 Ra>80
 Lumen:80lm/W
 Life time: >30000 hours
 Color temperature: 2700k, 6500k
 Product size: 232*232*50mm



Model No: (LPDL 12A-Y) 12w Surface LED, SQ / 4" PC+AL
 Wattage : 12w
 AC 220-240V
 Led chip 5730 Ra>80
 Lumen:80lm/W
 Life time: >30000 hours
 Color temperature: 2700k, 6500k
 Product size: 155*155*50mm



Model No: (LPDL 18A-Y) 18w Surface LED, SQ / 6" PC+AL
 Wattage : 18w
 AC 220-240V
 Led chip 5730 Ra>80
 Lumen:80lm/W
 Life time: >30000 hours
 Color temperature: 6500k
 Product size: 202*202*50mm

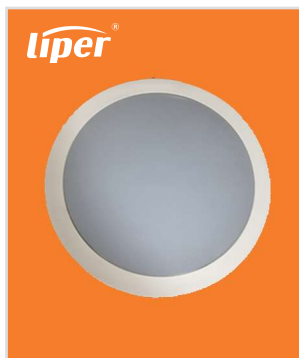

Model: LPDL-20A/30A-Y
 POWER: 20 W / 30W
 VOLTAGE:220-240V,50/60Hz
 Lumen:80lm/W
 Dimension:235X52mm
 Material:Aluminum+PC
 Protection rating:IP65
 ColorTemperature:2700k



Model: LPDL-12A-Y
 POWER:12W
 VOLTAGE:220-240V,50/60Hz
 Lumen:80lm/W
 Dimension:182X48mm
 Material:Aluminum+PC
 Protection rating: IP65 WITH SENSOR 6500K/2700K



Model No: (LPDL-3A-Y)3w COB Down Light

Wattage : 3w
AC 220-240V
Ra>85
Lumen:100lm/W
Life time: >30000 hours
Color temperature: 2700k, 6500k
Product size: 70*80mm



Model No: (LPDL 5A-Y) 5w COB Down Light

Wattage : 5w
AC 220-240V
Ra>85
Lumen:100lm/W
Life time: >30000 hours
Color temperature: 2700k, 6500k
Product size: 70*80mm



Model No: (LPDL 8A-Y) 8w COB Down Light

Wattage : 8w
AC 220-240V
Ra>85
Lumen:100lm/W
Life time: >30000 hours
Color temperature: 2700k, 6500k
Product size: 90*100mm



Model No: (LPDL 12A-Y) 12w COB Down Light

Wattage : 12w
AC 220-240V
Ra>85
Lumen:100lm/W
Life time: >30000 hours
Color temperature: 2700k, 6500k
Product size: 120*130mm



Model No: LED.JD.F.V

Power: 24W AC100-240V
Lumen:80lm/W
Power Factor:>0.9 AL+PMMA
Product size:300*300mm
Color temperature: 6500K/2700K



**Model No: LED.JD.F.V
(2*2 Panel Light conceal 40w)**

Power: 40W AC220-240V
Lumen: 80lm/W
155 ANGLE,>30000H
Power Factor:>0.8 AL+PMMA
Product size:595*595*9mm
ColorTemperature:6500k



Model: LED.JD.F.V

Power: 40W AC100-240V
Lumen:80LM/W
Power Factor:>0.8 AL+PMMA
Product size: 1200*300mm
Color temperature:6500K



Model: LED.JD.F.V

Power: 80W AC100-240V
Lumen:80LM/W
Power Factor:>0.8 AL+PMMA
Product size:1200*600mm
Color temperature:6500K



Model: LPFL400A

POWER:400W
VOLTAGE:220-240V,50/60Hz
Lumen:80lm/W
Dimension:573X73X490mm
Material:Aluminum
Protection rating:IP65



Model No: (LPTRL- 20w)20w Track light

Watts : 20w
AC 160-240V Ra>90
Lumen:100lm/W
Life time: >30000 hours
Color temperature: 2700k, 6500k
Product size: 100*116*165mm



LED Track Channel 1m



Model No: (LPHB-50W/70W)

High Bay Light
Watts:50W/ 70W
PF>0.95
Input: AC220-240V
SIZE:41.5*34CM
Lumen: 80 lm/W RA=80
Life time: >30000 hours
Color temperature:6500K



LPFL50A/LPFL100A

POWER:50 W/100W
VOLTAGE:220-240V,50/60Hz
Lumen: 80lm/W
Dimension:565*300*80mm
Color temperature: 6500k
Material:Aluminum
Protection rating:IP65



LPSTL-12W/18W

POWER:12W / 18W
VOLTAGE:220-240V,50/60Hz
Lumen:80lm/W
Dimension:200*430*120mm
Material:Aluminum
Protection rating:IP65
Battery capacity: 6600mAh
Color temperature: 6500k



LPFL20A

POWER:20W
VOLTAGE:220-240V,50/60Hz
Lumen:80lm/W
Dimension:235*295*130mm
Material:Aluminum+PC
Protection rating:IP44
10 meters wire, 2 USB ports (2A)
3 multi-function sockets (13A)
Color temperature: 6500k



Model No: LPTL20D04

Watts : 20w
Input: AC 200-240V~ 50/60Hz
Lumen Efficiency: more than 80lm/w
Life time: >30000 hours
Color temperature: 6500k
Square Frosted PC cover,
Single led strip



Model: LPTL30D04

Watts : 2*16w
Input: AC 100-240V~ 50/60Hz
Lumen Efficiency: 80lm/w
Color temperature: 6500k
Square Frosted PC cover
Double led strips



Model No: (LPFL-30K04) Flood Light (Foldable/Stretchable)

Watts: 30W PF>0.95
Input: AC220-240V
Lumen: 80-100lm/W RA=75
Life time: >30000 hours
Product Size:250*324*36

SIZE:41.5*34CM



Model No : LPFL10A/20A Floodlight

POWER:10W/20W
VOLTAGE:200-240V,50/60Hz
Lumen: 1720-1810lm
Dimension:180*187*37mm
Chips: Epistar
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: LPFL30A Floodlight

POWER:30W
VOLTAGE:200-240V,50/60Hz
Lumen: 2650-2730lm
Dimension:193*197*37mm
Chips :Epistar
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL50A) Floodlight

POWER:50W
VOLTAGE:220-240V,50/60Hz
Lumen: 4000-4500lm
Dimension:258*257*42mm
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 2700k, 6500k



Model No: LPFL100A

POWER:100W
VOLTAGE:200-240V,50/60Hz
Lumen: 7850-8200lm
Dimension:288*250*72mm
Chips: Epistar
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL150A)Floodlight

POWER:150W
VOLTAGE:220-240V,50/60Hz
Lumen: 12000-15000lm
Dimension:370*345*70mm
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL-10A) Floodlight with sensor

POWER:10W
VOLTAGE:220-240V,50/60Hz
Lumen:890-950lm
Dimension:137*164*52mm
RA:>80
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL-20A) Floodlight with sensor

POWER:20W
RA:>80
VOLTAGE:220-240V,50/60Hz
Lumen: 1720-1810lm
Dimension:180*210*57mm
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL-30A) Floodlight with sensor

POWER:30W
RA:>80
VOLTAGE:220-240V,50/60Hz
Lumen: 2650-2730lm
Dimension:193*37*197mm
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k



Model No: (LPFL-50A) Floodlight with sensor

POWER:50W
RA:>80
VOLTAGE:220-240V,50/60Hz
Lumen: 2650-2730lm
Dimension:193*37*197mm
Material: Aluminum
Protection rating:IP65
Color temperature: 6500k

KSD LED Bulb



Round Bulb:

Warranty: 1 year
Wattage: 3/5/7/9/12/15/18/24/40W
Color: White/Warm
Voltage: 85V-265V
Color temperature: 6500K daylight
Life span 25000 hours
Lumens: 90 per watt
Base: E27



Round Nib Bulb:

Warranty: 1 year
Wattage: 3/5/7/9/12/15/18/24/40W
Color: White/Warm
Voltage: 85V-265V
Color temperature: 6500K daylight
Life span 25000 hours
Lumens: 90 per watt
Base: B22



Led Bulb Candle:

Warranty: 1 year
Wattage: 5W
Color: Warm / white
Voltage: 85V-265V
Color temperature: 6500K daylight
Life span 25000 hours
Lumens: 90 per watt
Base: E14

SURFACE PANEL LIGHT (KSD)



Specifications:

- Shape: Round and Square
- Frame Color: White, Wooden, AB, SN and RAB
- Warranty: 1 year
- Life span: 30000 hours
- Input Voltage: 85-265v
- Power: 3,6,12,18,24 watt
- Lumens: 80 per watt
- Compared to incandescent bulb it can save over 80 percent electricity cost
- No UV radiation
- Easy Installation
- High Quality withheld
- Protection rating IP20
- Instant start 0-100% in 0 seconds

CONCEAL PANEL LIGHT (KSD)



Specifications:

- Shape: Round and Square
- Frame Color: White
- Warranty: 1 year
- Life span: 30000 hours
- Input Voltage: 85-265v
- Power: 3,6,12,18,24 watt
- Lumens: 80 per watt
- Compared to incandescent bulb it can save over 80 percent electricity cost
- No UV radiation
- Easy Installation
- High Quality withheld
- Protection rating IP20
- Instant start 0-100% in 0 seconds



Exclusive lifestyle experience



**Advanced
Switch Socket**





KSHAMADEVI LIGHT HOUSE PVT. LTD.

Kaushaltar, Bhaktapur, 01-6632137, 9851011574, 9851239165

Email: light@kshamadevigroup.com

सबैको लागि, सधैको लागि क्षमादेवी

Also remember us for:

UPVC Window & Door | UPVC Roofing Sheet | Aluminium Profile | Hardware | Prefab House | Gypsum Board
Tile & Marbles | Pipe & Fittings | Cement Board | Prefab Board